



HT-M7603

Indoor LoRa Gateway





Document version

Version	Time	Description	Remark
Rev. 1.0	2023-5-16	Preliminary version	Aaron

Copyright Notice

All contents in the files are protected by copyright law, and all copyrights are reserved by Chengdu Heltec Automation Technology Co., Ltd. (hereinafter referred to as Heltec). Without written permission, all commercial use of the files from Heltec are forbidden, such as copy, distribute, reproduce the files, etc., but non-commercial purpose, downloaded or printed by individual are welcome.

Disclaimer

Chengdu Heltec Automation Technology Co., Ltd. reserves the right to change, modify or improve the document and product described herein. Its contents are subject to change without notice. These instructions are intended for you use.



Content

HT-M7603	1
Document version	2
Copyright Notice	2
Disclaimer	2
Content	3
1. Description	4
1.1 Overview	4
1.2 Product features	5
2. Specifications	6
2.1 General specification	6
2.2 Operating conditions	7
2.3 RF characteristics	7
3. Typical hardware connections	8
3.1 Physical dimensions	8
4. Resource	9
4.1 Relevant resource	9
4.2 Heltec Contact Information	9



1. Description

1.1 Overview

HT-M7603 is a high cost-effective indoor standard LoRaWAN gateway, which can be used independently or as a blind filling gateway. With simple configuration, it allows you to bridge LoRa wireless networks to IP networks and different network servers via Wi-Fi or Ethernet.

This gateway has a sleek, contemporary design. It is wall-mounted, can be easily placed anywhere indoor to ensure that it provides adequate signal coverage.

HT-M7603 are available in three product variants:

Table 1.1 Product model list

No.	Model	Description
1	HT-M7603-470T510	470~510MHz working LoRa frequency, used for China mainland (CN470) LPW band.
2	HT-M7603-863T870	863~870MHz working LoRa frequency, used for EU868, IN865 LPW bands.
3	HT-M7603-902T923	902~923MHz working frequency, used for AS923, US915, AU915, KR920 LPW bands.



1.2 Product features

- MT7628 MCU, SX1303 + SX1250 Chipset.
- Wi-Fi and Ethernet supported.
- Maximum output: 27 ± 2 dBm.
- The power supply voltage: 5V.
- Strong performance, good stability and long transmission distance.
- Easy to configuration on the Web UI by connecting to the device Wi-Fi (Table 1.2).
- Light and fashionable, wall-mounted, simple to install.
- -20°C to 70°C maximum operating temperature range.
- Support **LoRaWAN Class A, Class C, custom MQTT** protocols.
- Working bands: Full band coverage corresponds to the working frequency option.

Table 1.2: HT-M7603 setting page

HT-M7603		Status	System	Logout
Status				
MAC_ETH		1:5D		
MAC_WLAN		1:5E		
Lora Status		Running		
Region		EU868		
Switch Region		EU868		▼
Gateway Mode		LoRaWan packet forwarder		▼
Server Address		<input type="text" value="lora.heltec.org"/>		
Port Up		<input type="text" value="1700"/>		
Port Down		<input type="text" value="1700"/>		
Gateway ID		<input type="text" value="2115D"/>		
		<input type="button" value="Set Gateway"/>		



2. Specifications

2.1 General specification

Table 2.1 General specification

Parameters	Description
MCU	MTK7628
LoRa Chipset	SX1303 + SX1250
Multi-channel	Eight (8) uplink, one (1) downlink.
Frequency	470~510/863~870/902~923MHz
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
Ethernet	10/100M
Max. Receiving sensitivity	-139dBm
Max. TX Power	+27 ± 2dBm ^①
Supply voltage	+5V
Power consumption	See Table2.2.2
Operating temperature	-20 ~ 70°C
Operating humidity	10%~90%, no-condensing
Dimensions	116*65*30 mm



2.2 Operating conditions

2.2.1 Power supply range

Table 2.2.1: Power supply range

Parameter	Min.	Typical	Max.	Unit
Device operating input voltage	4.80	5.00	6.00	V

2.2.2 Power consumption

Table 2.2.2: Working current

Mode	Condition	Min	Max
Active-Mode (RX)	ETH	170mA	190mA
	Wi-Fi	200mA	250mA
Active-Mode (TX)	TX power is 27dBm @ 5V supply.	400mA	450mA

2.3 RF characteristics

The following table gives typically sensitivity level of the HT-M7603 Indoor LoRa Gateway.


Table 2.4: LoRa RF characteristics

Signal Bandwidth/[KHz]	Spreading Factor	Sensitivity/[dBm]
125	SF12	-139
125	SF10	-134
125	SF7	-125
125	SF5	-121
250	SF9	-124



3. Typical hardware connections

3.1 Physical dimensions

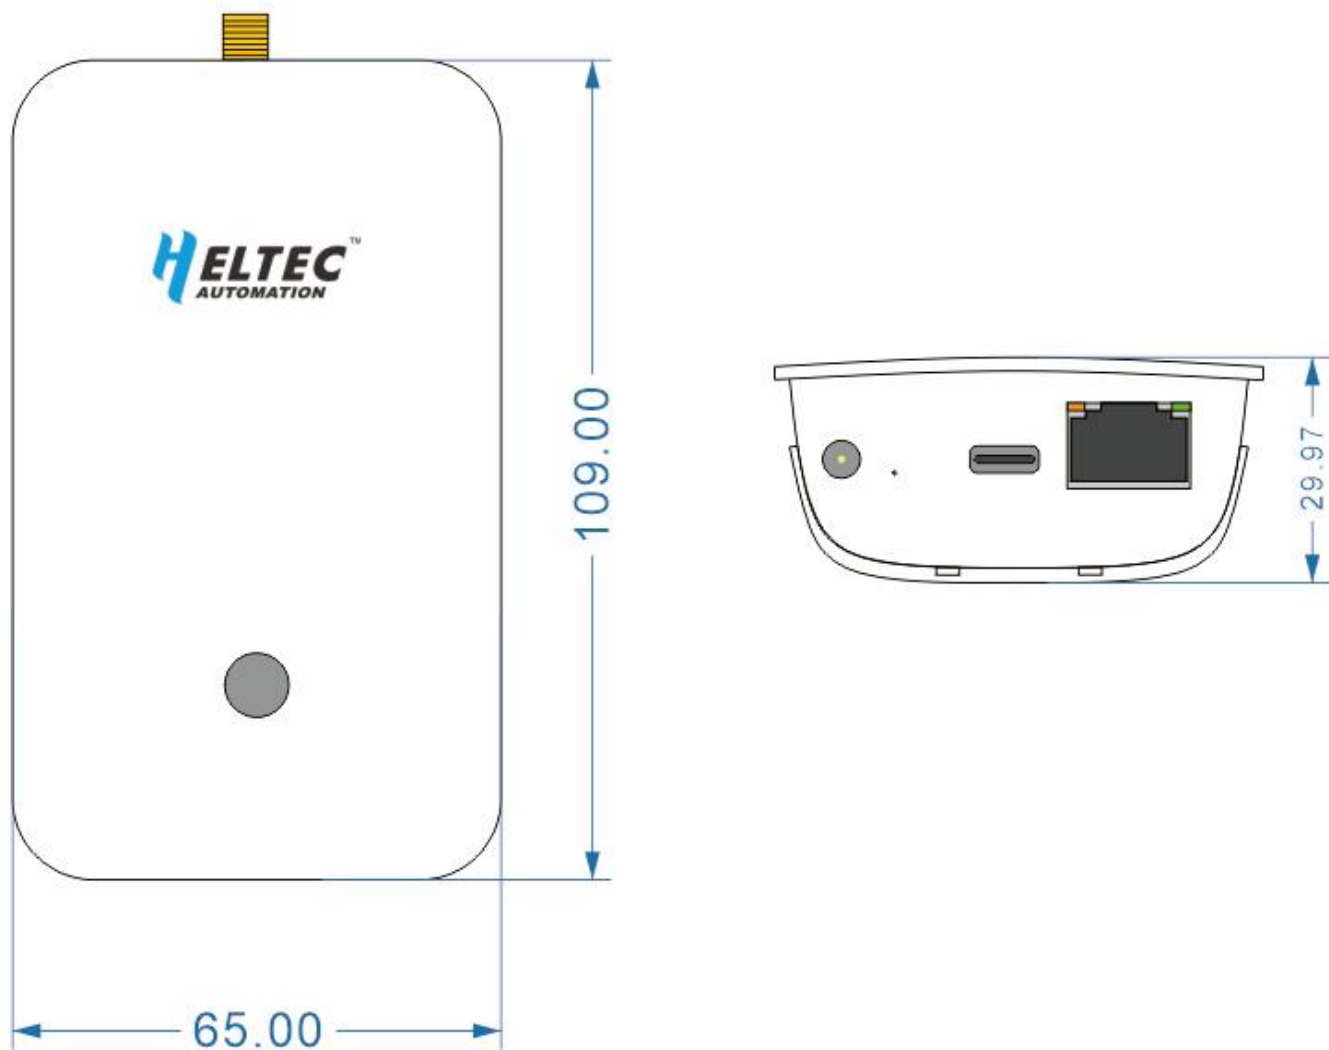



4. Resource

4.1 Relevant resource

- Heltec LoRaWAN test server based on TTS V3:

<https://lora.heltec.org/>

- HT-M7603 Documents Page:

<https://docs.heltec.org/en/gateway/ht-m7603/index.html>

- HT-M7603 FAQ:

https://heltec-hotspot-docs.readthedocs.io/en/latest/hotspot_faq.html

4.2 Heltec Contact Informonati

Heltec Automation Technology Co., Ltd

Chengdu, Sichuan, China

Email: support@heltec.cn

Phone: +86-028-62374838

<https://heltec.org>