



[HT-M01S \(Rev. 2.0\)](#)

Indoor LoRa Gateway





Document version

Version	Time	Description	Remark
Rev. 1.0	2022-9-16	Preliminary version	Aaron
Rev. 1.1	2023-2-22	Information correction	Aaron

Copyright Notice

All contents in the files are protected by copyright law, and all copyrights are reserved by Chengdu Heltec Automation Technology Co., Ltd. (hereinafter referred to as Heltec). Without written permission, all commercial use of the files from Heltec are forbidden, such as copy, distribute, reproduce the files, etc., but non-commercial purpose, downloaded or printed by individual are welcome.

Disclaimer

Chengdu Heltec Automation Technology Co., Ltd. reserves the right to change, modify or improve the document and product described herein. Its contents are subject to change without notice. These instructions are intended for you use.



Content

HT-M01S (Rev. 2.0)	1
document version	2
Copyright Notice	2
Disclaimer.....	2
Content.....	3
1. Description	4
1.1 Overview.....	4
1.2 Product features.....	5
2. Specifications	6
2.1 General specification.....	6
2.2 Operating conditions.....	7
2.3 RF characteristics.....	7
2.4 Interact.....	8
3. Typical hardware connections	9
3.1 Physical dimensions.....	9
4. Resource.....	10
4.1 Relevant resource.....	10
4.2 Heltec Contact Information.....	10



1. Description

1.1 Overview

The biggest feature of HT-M01S (Rev. 2.0) is that it is a standard LoRaWAN gateway based on **ESP32 MCU**, without running Linux operating system on high-performance CPU, which can greatly reduce the cost of a standard LoRaWAN gateway.

It also acts as an assist device for the Helium Hotspot. When you are participating in the Helium project, you may have the following needs:

- You may need a device that can detect the number of nearby Beacons, help you find the best deployment location, and get as much profit as possible.
- When your Helium hotspot is deployed, you will find that the long antenna feeder will cause signal attenuation and affect your choice of antenna placement.

Generally speaking, HT-M01S (Rev. 2.0) has the following three features:

- Can be used as a regular LoRaWAN gateway.
- Can be used as Helium Beacon Sniffer.
- Can be used as an external transfer of Heltec Indoor Hotspot, HT-1303 LoRaWAN.

HT-M01S (Rev. 2.0) are available in three product variants:

Table 1.1 Product model list

No.	Model	Description
1	HT-M01S-470T510	470~510MHz working LoRa frequency, used for China mainland (CN470) LPW band.
2	HT-M01S -863T870	863~870MHz working LoRa frequency, used for EU868, IN865 LPW bands.



3	HT-M01S-902T923	902~923MHz working frequency, used for AS923, US915, AU915, KR920 LPW bands.
---	-----------------	--

1.2 Product features

- 3 In 1 function:
 - Helium Beacon Sniffer,
 - LoRa External Transceiver (Only for the Helium hotspot made by Heltec),
 - Ready to use Normal LoRaWAN Gateway.
- ESP32 MCU,
- Wi-Fi and Ethernet supported,
- Based on Heltec HT1303 LoRaWAN Concentrator Module,
- Maximum output: 27 ± 2 dBm
- The power supply voltage: 5V
- Support for **LoRaWAN Class A, and Class C** protocols,
- -20°C to 70°C maximum operating temperature range,
- Working bands: Full band coverage corresponds to the working frequency option.



2. Specifications

2.1 General specification

Table 2.1 General specification

Parameters	Description
MCU	ESP32-D0WDQ6
LoRa Chipset	SX1303 + SX1250
Multi-channel	Eight (8) uplink, one (1) downlink.
Frequency	863~870MHz, 902~928MHz, 470~510MHz
Max. Receiving sensitivity	-139dBm
Max. TX Power	+27 ± 2 dBm ^①
Wi-Fi	802.11 b/g/n
Ethernet	100M RJ45
Supply voltage	+5V
Power consumption	Tx (Max) ≈ 550mA, Rx ≈ 120mA, standby 7.5mA
Operating temperature	-20 ~ 70 °C
Operating humidity	10%~90%, no-condensing
Dimensions	70(+11) x 70 x 23 mm
Shell material	Aluminum housing, tempered glass panel.


^① The HT-M01S -470T510 version used in mainland China has a maximum output of 22 ± 2 dBm.



2.2 Operating conditions

2.2.1 Power supply range

Table 2.2: Power supply range

Symbol	Parameter	Min.	Typical	Max.	Unit
	Device operating input voltage	4.80	5.00	6.00	V

2.2.2 Power consumption

Table 2.3: Working current

Mode	Condition	Min. ^②	Max. ^③
Active-Mode (TX)	TX power is 27dBm @ 5V supply.	380mA	440mA
Active-Mode (RX)	TX disabled; RX enabled.	113mA	175mA

2.3 RF characteristics

The following table gives typically sensitivity level of the HT-M01S (Rev. 2.0) Indoor LoRa gateway.

Table 2.4: LoRa RF characteristics

Signal Bandwidth/[KHz]	Spreading Factor	Sensitivity/[dBm]
125	SF12	-139
125	SF10	-134
125	SF7	-125
125	SF5	-121
250	SF9	-124



^② Measured when connected to the Internet via Wi-Fi mode.

^③ Measured when connected to the Internet via ethernet mode.



2.4 Interact


Table 2.5: HT-M01S (Rev. 2.0) interact part description

Symbol/Name	Type	Function
+	Key	System config.
-	Key	System config.
RST	Key	System reset.
	Socket	<ul style="list-style-type: none">● System log output.● Firmware upgrade.● +5V DC power input.
	Socket	RJ45 ethernet cable socket
WiFi	Socket	SMA socket for Wi-Fi antenna.
LoRa	Socket	SMA socket for LoRa antenna.
Front panel	Display	System information display.



3. Typical hardware connections

3.1 Physical dimensions

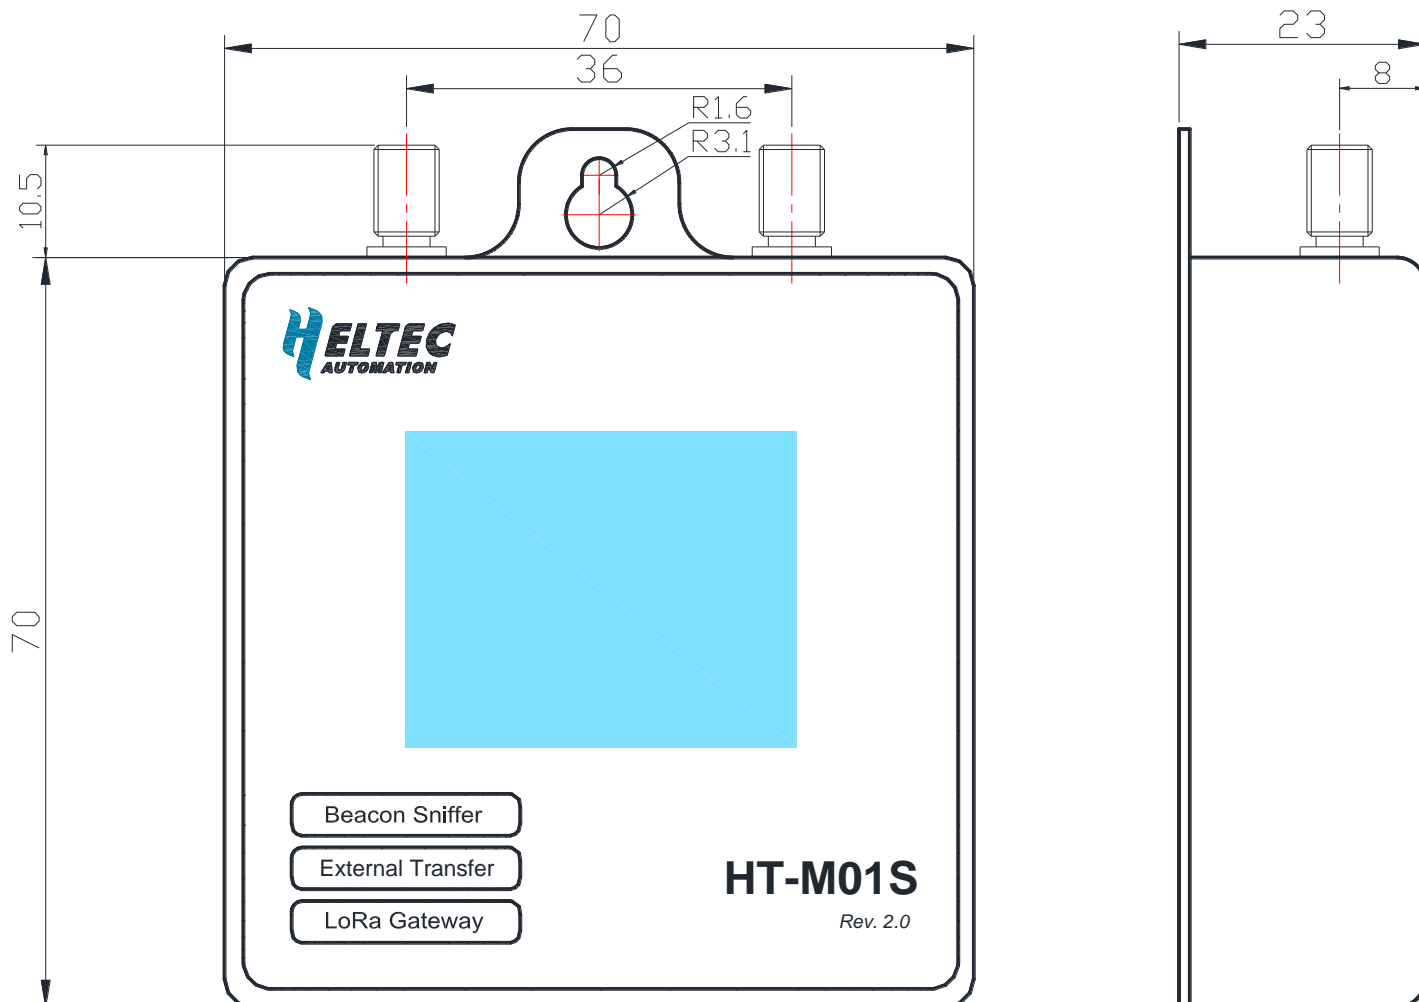



4. Resource

4.1 Relevant resource

- Operation user manual: <https://docs.heltec.org/en/gateway/ht-m01s/>
- Heltec LoRaWAN test server based on TTS V3: <https://lora.heltec.org/>
- Downloadable Resources: https://resource.heltec.cn/download/HT-M01S_V2

4.2 Heltec Contact Information

Heltec Automation Technology Co., Ltd

Chengdu, Sichuan, China

Email: support@heltec.cn

Phone: +86-028-62374838

<https://heltec.org>