



MeshTower

Solar-Powered Outdoor Mesh Hub



Document Version

Version	Time	Description	Remark
Rev. 1.0	2025-6-16	Preliminary version	Richard

Copyright Notice

All contents in the files are protected by copyright law, and all copyrights are reserved by Chengdu Heltec Automation Technology Co., Ltd. (hereinafter referred to as Heltec). Without written permission, all commercial use of the files from Heltec are forbidden, such as copy, distribute, reproduce the files, etc., but non-commercial purpose, downloaded or printed by individual are welcome.

Disclaimer

Chengdu Heltec Automation Technology Co., Ltd. reserves the right to change, modify or improve the document and product described herein. Its contents are subject to change without notice. These instructions are intended for you use.

Content

1 Description	4
1.1 Overview	4
1.2 Features	4
1.3 Typical Applications	5
3 Specifications	6
3.1 General Specification	6
3.2 Main Control Module Specification	7
4 Electrical Characteristics	8
4.1 Voltage Input	8
4.2 Battery Parameters	错误！未定义书签。
4.3 Pack Output	错误！未定义书签。
4.4 Protection and Balancing	错误！未定义书签。
5 RF Characteristics	8
5.1 RF module power consumption	9
5.2 LoRa Transmit Power	9
5.3 LoRa Receiving Sensitivity	9
5.4 LoRaWAN Operation Frequencies	10
5 Physical Dimensions	11
6 Resource	12
6.1 BMS Board Schematic	12
6.2 HT-N5262M Schematic	12
6.3 Resource Station	12
6.4 Heltec nRF52840 Framework	12
7 Heltec Contact Information	12



1 Description

1.1 Overview

MeshTower is a solar-powered outdoor communication system built on MeshSolar technology, featuring an integrated 18V solar panel and 3 × 3000mAh lithium battery for sustained operation. With Bluetooth + LoRa dual-mode connectivity and SMA antenna support, it ensures robust signal coverage. Housed in an IP65-rated waterproof metal enclosure and designed for -20°C to 60°C environments, it thrives in harsh conditions. Offering pole/wall-mount flexibility, it's ideal for remote monitoring and off-grid communication — delivering solar endurance and industrial resilience.

1.2 Features

- Developed based on the MeshSolar board, integrated with 3×3000mAh high-capacity lithium batteries.
- Professional BMS Performance, features comprehensive protection including overcharge/over-discharge/short-circuit/over-temperature safeguards etc.
- 18V solar input, adjustable panel angle.
- Supports DC 18-25V and USB-C PD3.0 input.
- Dual Support for LoRa & Bluetooth.
- External SMA antenna compatible.
- Excellent Low-Power Efficiency.



- Wide-Temperature Battery (-20°C to 60°C).
- IP65-rated metal enclosure, waterproof & flame-retardant.
- Easy installation, supports pole mounting and wall mounting.

1.3 Typical Applications

- Environmental Monitoring Systems
- Smart Agriculture & Livestock Farming
- Asset Management and Tracking
- Outdoor Emergency Solutions
- Solar Street Lighting Systems
- Industrial Infrastructure Monitoring
- Open-source projects like such as Meshtastic

3 Specifications

3.1 General Specification

Table3.1: General specification

Parameters	Description
BMS chip	BQ4050, CN3795
RF chip	nRF52840(BLE) SX1262(LoRa)
GNSS Module	L76K(GPS、GLONASS、BDS、Galileo、QZSS)
Battery Capacity	3*3000mAh
Battery Type	Li-ion battery
Operating Temperature Range	-20~60℃
Voltage Input	18V
Voltage Output	12.6V
LoRa TX Power	21±1dBm
Interface	SMA (RP-SMA) female jack antenna connector, USB-C, XT30 Panel Interface
Protection Rating	IP66
Dimensions	Enclosure: 125 (+40) * 125 * 52 mm Panel: 320 * 230 mm
Weight	



3.2 Main Control Module Specification

Table3.2: Main Control Module specification

Parameters	Description
Processor	Nordic nRF52840
LoRa Chip	SX1262
Chip Memory	1M ROM; 256kB SRAM
Wireless	BLE, LoRa
Transmit Power	21±1dBm
Operating temperature	-40~85℃
Operating Humidity	90%(No condensing)
Power Supply	3.3V
Power Consumption	Table5.1
Hardware Resource	3*SPI, 2*I2C, 2*UART, 4*PWM, QPSI, I2S, PDM, QDEC, Etc.
Interface	2*IPEX(UF.L)1.0, M.2 male plug



4 Electrical Characteristics

4.1 Voltage Input

The Solar/DC input supports both solar panel and DC power sources, with a requirement that the **Voc**(open-circuit voltage) must exceed 18V not exceed 25V. The USB-C port only enables charging functionality when it detects a PD3.0 protocol with a 20V input voltage; a 5V input is solely for powering the MCU.

Table4.1: Voltage Input

Parameter	Voc Min	Vmp	Voc Max	Unit
Solar(Voc)	18	18	25	V
DC	18		25	V
USB-C(Charging)		20		V
USB-C(MCU)	4.5	5	5.5	V

4.2 Charging Current

Table4.2: Changing Current

Method	Current	Description
Solar(Voc)@18V/10W	0.55A	Depends on the solar panel's power and voltage. The minimum is >0, while the maximum = P_{solar} / V_{solar}
DC@18V	1.5A	Constant-current charging at 1.5A, tapering down when battery voltage reaches 4.2V
USB-C(PD3.0)	1.5A	Constant-current charging at 1.5A, tapering down when battery voltage reaches 4V



5 RF Characteristics

5.1 RF module power consumption

The test data comes from the standalone test results of the HT-N5262M, using the sample code from the official [Heltec nRF5240 library](#).

Table5.1: Transmit power

Mode	Condition	470MHz	868MHz	915MHz
LoRa_TX	5dBm		83mA	93mA
	10dBm		108mA	122mA
	15dBm		136mA	151mA
	20dBm		157mA	164mA
BT	UART	93mA		
	Scan	132mA		
Sleep		8uA		

5.2 LoRa Transmit Power

Table5.2: Transmit power

Operating frequency band	Maximum power value/[dBm]
863~870	21 ± 1
902~928	21 ± 1

5.3 LoRa Receiving Sensitivity

The following table gives typically sensitivity level.

Table5.3: Receiving sensitivity

Signal Bandwidth/[KHz]	Spreading Factor	Sensitivity/[dBm]
125	SF12	-135



125	SF10	-130
125	SF7	-124

5.4 LoRaWAN Operation Frequencies

HT-N5262M supports LoRaWAN frequency channels and models corresponding table.


Table5.4: Operation Frequencies

Region	Frequency (MHz)	Model
IN868	865~867	HT-N5262M-HF
EU868	863~870	HT-N5262M-HF
US915	902~928	HT-N5262M-HF
AU915	915~928	HT-N5262M-HF
KR920	920~923	HT-N5262M-HF
AS923	920~925	HT-N5262M-HF



5 Physical Dimensions

5.1

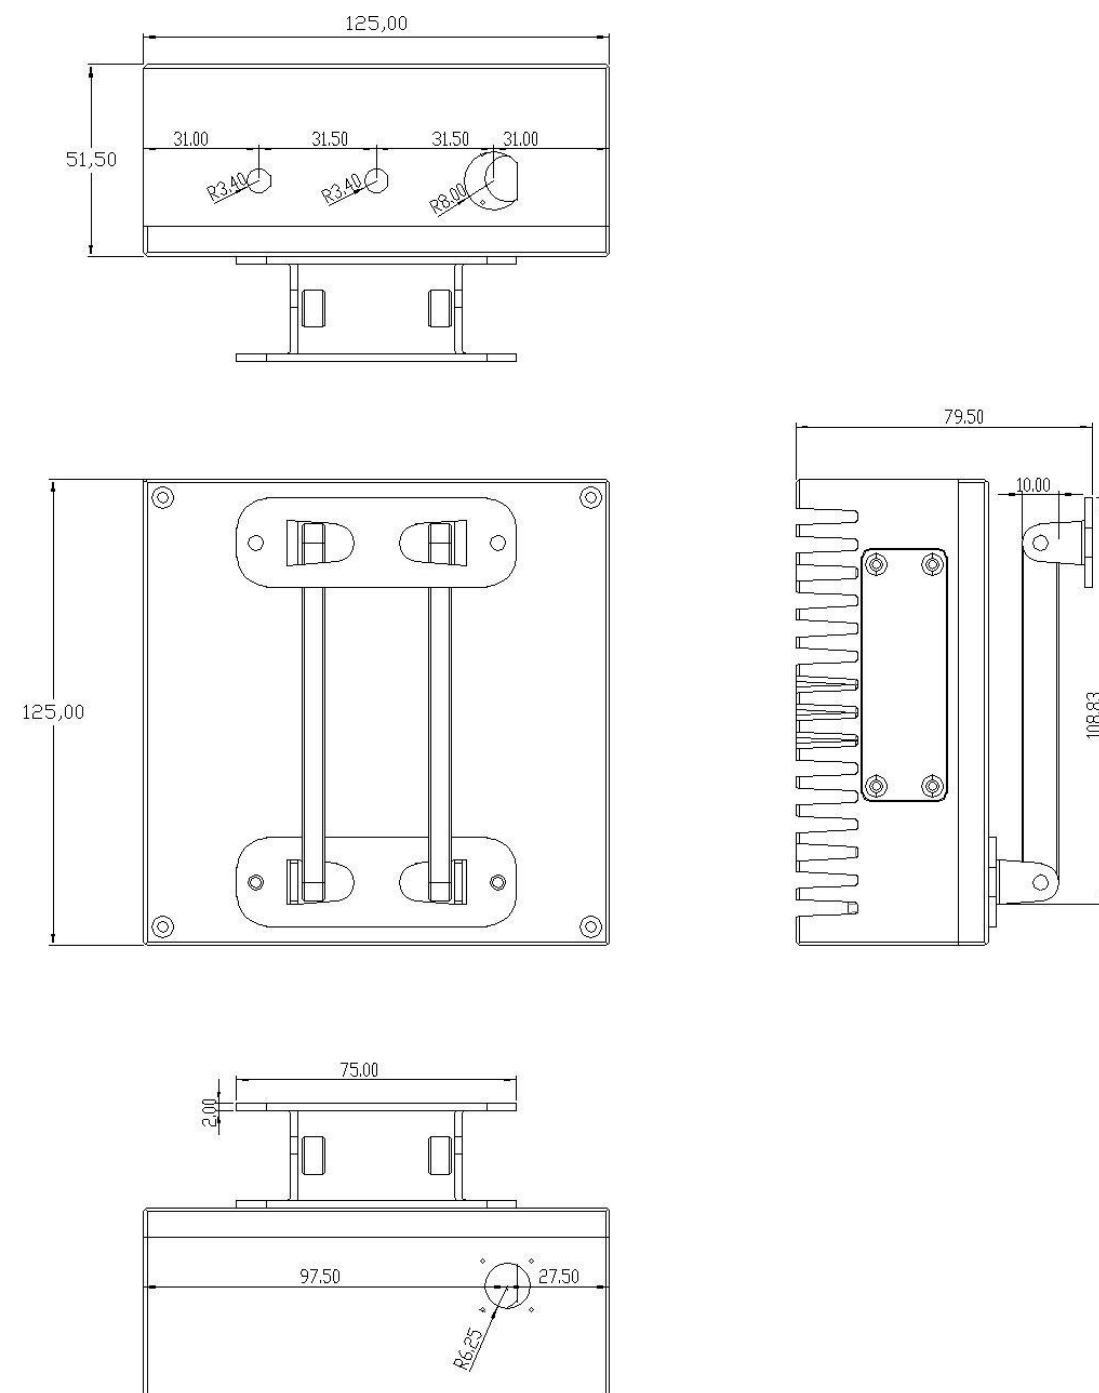



6 Resource

6.1 [BMS Board Schematic](#)

6.2 [HT-N5262M Schematic](#)

6.3 [Resource Station](#)

6.4 [Heltec nRF52840 Framework](#)

7 Heltec Contact Information

Heltec Automation Technology Co., Ltd

Chengdu, Sichuan, China

Email: support@heltec.cn

Phone: +86-028-62374838

<https://heltec.org>