










CubeCell HTCC-AB02S Pinout Diagram

Notes:

- VS* : Solar input pin(5.5V~7V)
- VEXT : External power supply (3.3V), control the switch of VEXT through GPIO(LOW-ON,HIGH-OFF)
- VDD : 3.3V
- VIN : 5V
- NSS2 can choose any IO port

	GND
	Power
	Control
	PWM Pin
	GPIO Port pin
	Analog Pin
	DAC
	Serial SPI I2C
	Physical Pin
	On-board hardware Pin

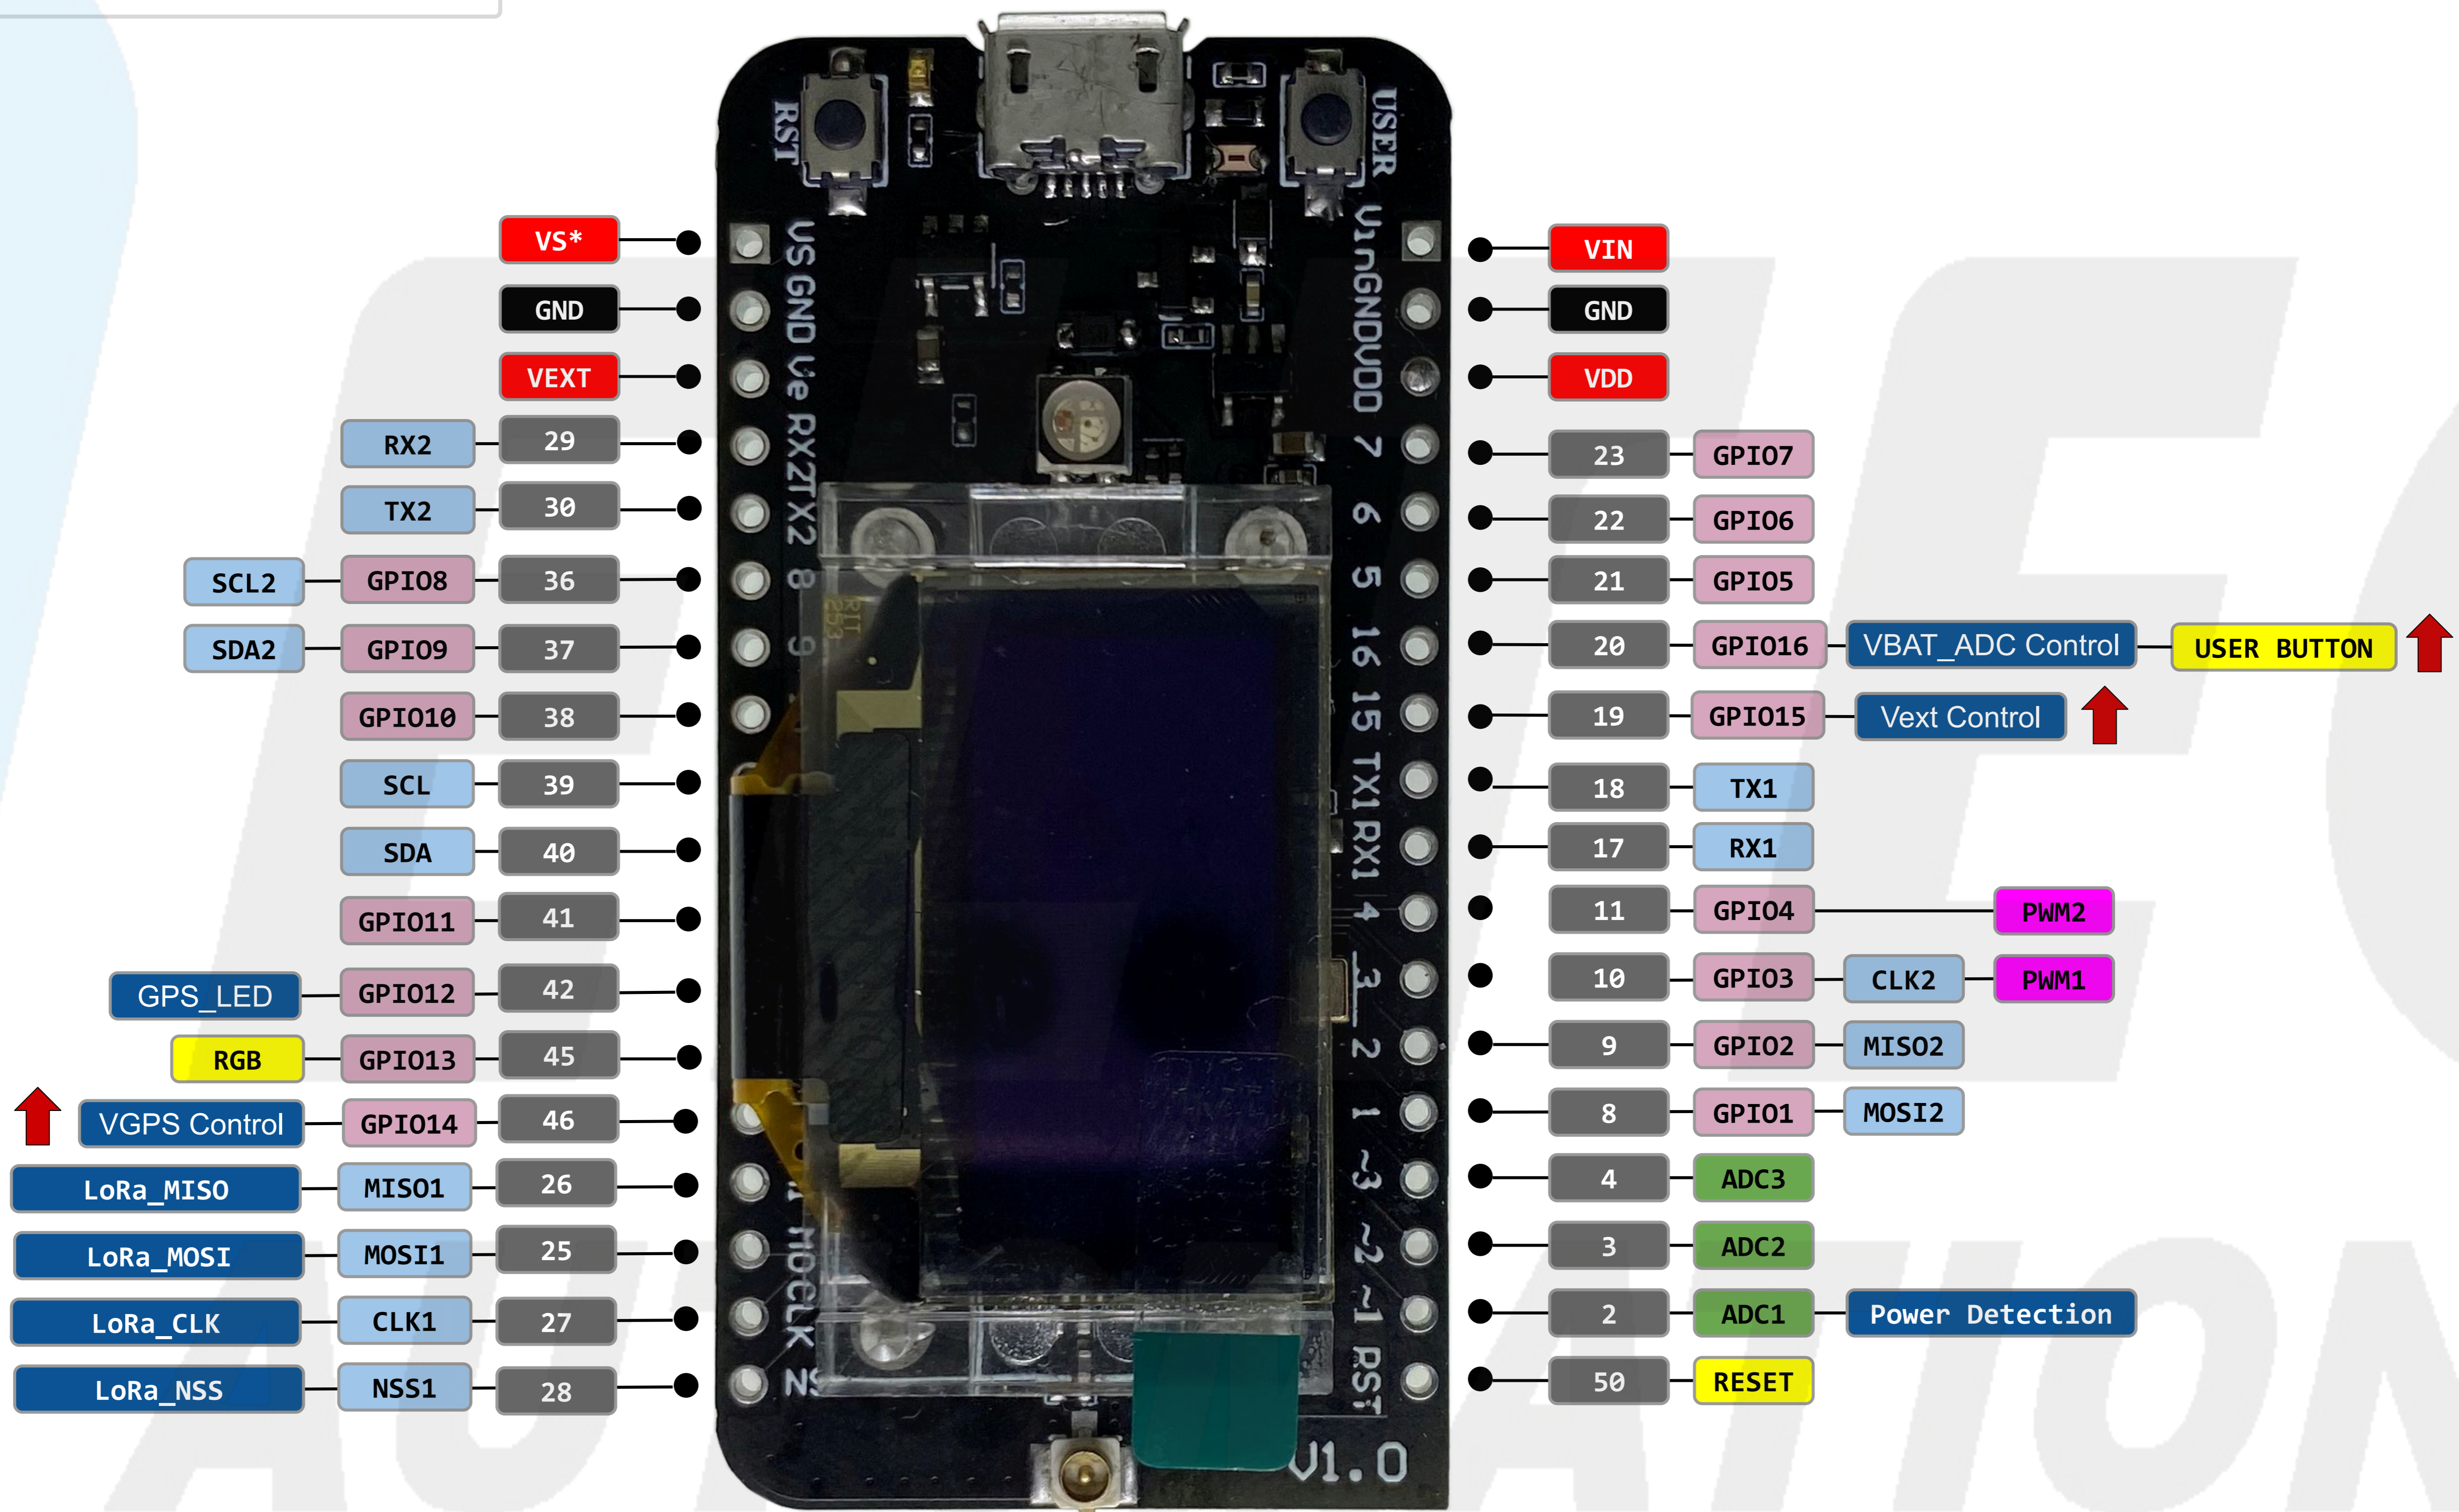

 PULL-UP