



HT-H7608

Wi-Fi HaLow Router





Document version

Version	Time	Description	Remark
Rev. 1.0	2024-9-16	Preliminary version	Richard

Copyright Notice

All contents in the files are protected by copyright law, and all copyrights are reserved by Chengdu Heltec Automation Technology Co., Ltd. (hereinafter referred to as Heltec). Without written permission, all commercial use of the files from Heltec are forbidden, such as copy, distribute, reproduce the files, etc., but non-commercial purpose, downloaded or printed by individual are welcome.

Disclaimer

Chengdu Heltec Automation Technology Co., Ltd. reserves the right to change, modify or improve the document and product described herein. Its contents are subject to change without notice. These instructions are intended for you use.



Content

HT-H7608	1
Document version	2
Copyright Notice	2
Disclaimer	2
Content	3
1. Description	4
1.1 Overview	4
1.2 Product Features	5
1.3 Application	6
2. Specifications	7
2.1 Generic Parameter	7
2.2 Wi-Fi HaLow parameters	7
2.3 Power consumption	8
2.4 RF Specifications	8
2.5 Channel&Bandwidth	9
2.6 RGB status indicator description	10
2.7 Button description	11
3 Get Started	12
3.1 Installation bracket	12
3.2 Hardware Connection	12
3.3 Configuration	13
4 Hardware Dimensions	14
5.Resource	15
5.1Relevant resource	15
5.2 Heltec Contact Information	15


<https://heltec.org>

1. Description

1.1 Overview

[HT-H7608](#) is an innovative WiFi HaLow gateway from Heltec Automation designed to meet the needs of **long-distance/high-speed** data transmission for IoT applications. The gateway uses WiFi HaLow(IEEE 802.11ah) technology that operates in the sub-1 GHz unlicensed band, which has stronger penetration and larger coverage compared with the traditional WiFi standard.


H7608 is equipped with powerful hardware including advanced RF capabilities, high-performance MCU, and flexible interfaces for seamless integration with existing networks. It can be easily configured and OTA upgraded through web UI, and supports the simultaneous connection of a large number of devices, which making it a great solution for intelligent manufacturing, intelligent agriculture and smart city, etc.

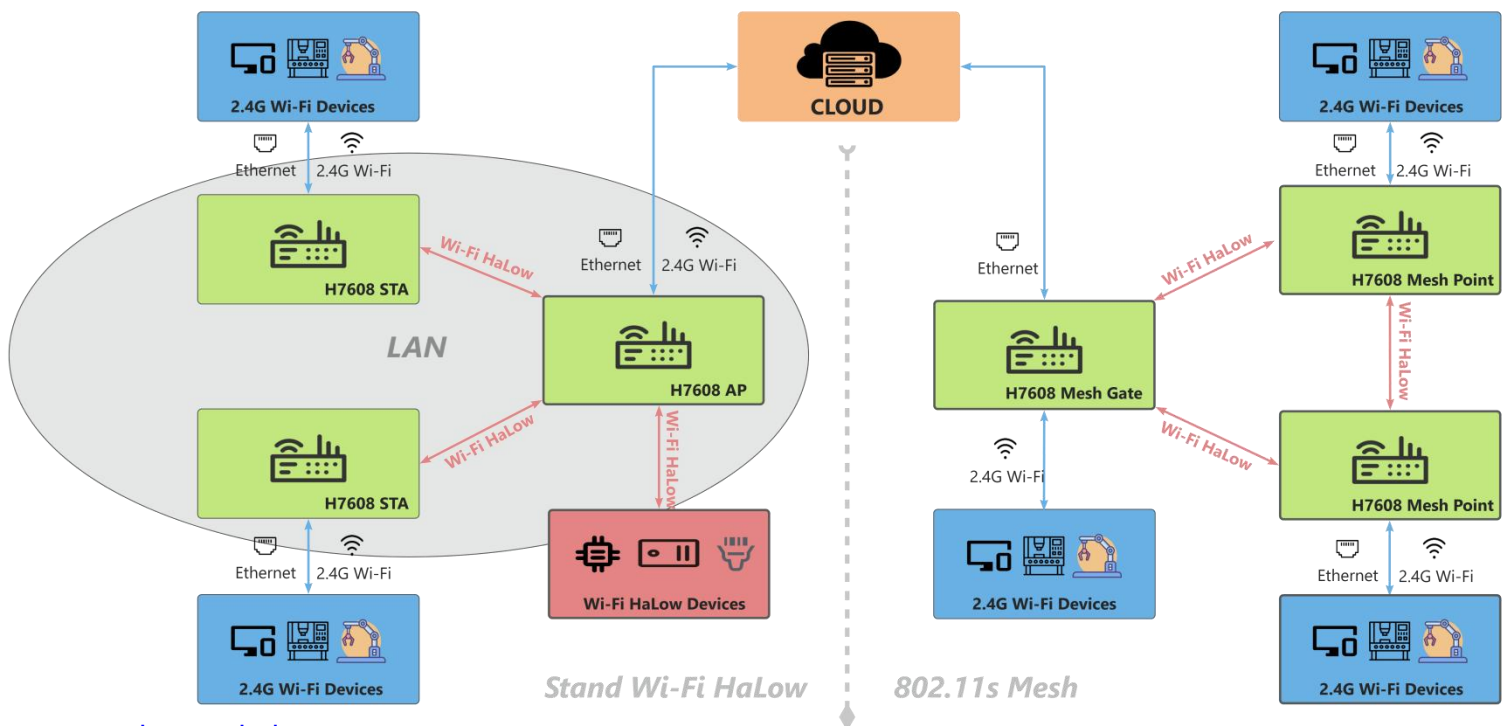

<https://heltec.org>

1.2 Product Features

- Wi-Fi and Ethernet supported, WiFi HaLow and 2.4GHz dual-band design.
- Long-range transmission capability, the range can reach 1km and further within the visual distance.
- Supports access to a large number of devices, more than 4 times that of traditional Wi-Fi access points.
- High transmission speed, it maintains 150Kbps at the limit distance and 32Mbps at close distances.
- Flexible networking methods, including AP, STA, Mesh, etc.
- Easy setup and OTA upgrade via the Web UI.
- Light and stylish wall-mounted, simple to install.
- -40°C to 85°C maximum operating temperature range.

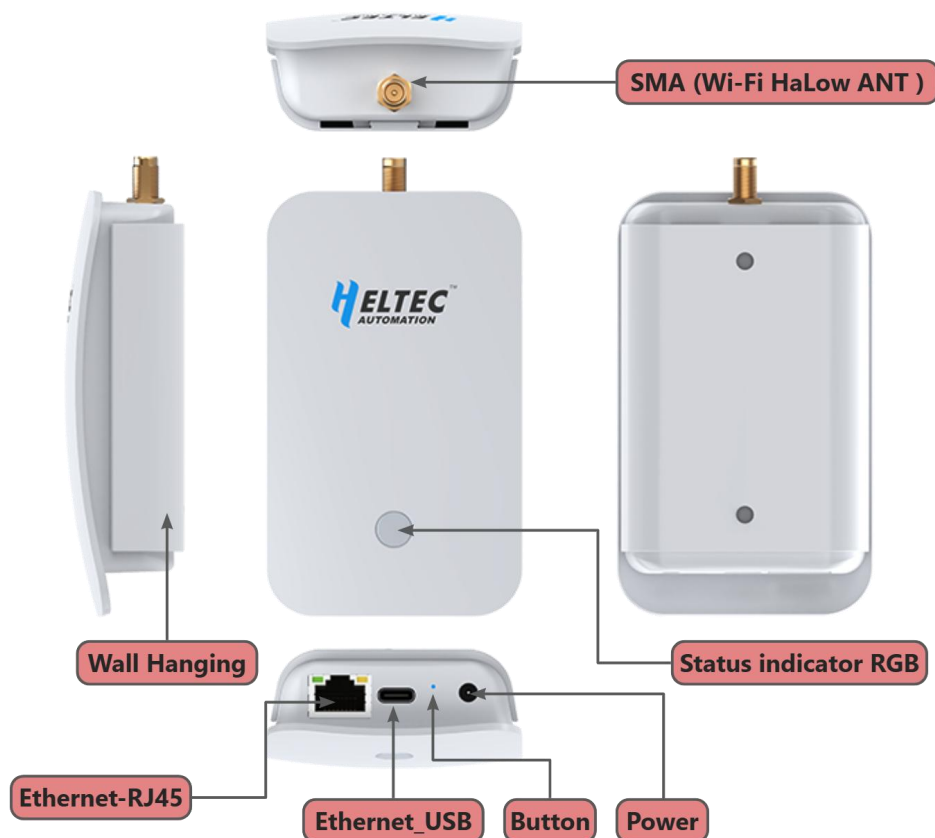



1.3 Application

Wi-Fi HaLow technology is suitable for most IoT scenarios, especially those that require high-speed transmission. Here are some common application scenarios.

If you have any questions or customization requirements, please feel free to

[contact us.](#)

- ✓ Remote camera monitoring
- ✓ Industrial automation control
- ✓ Asset management and tracking
- ✓ Old device Information upgrade
- ✓ Smart Home
- ✓ Smart City
- ✓ Wi-Fi/Ethernet/Wi-Fi_HaLow extension and bridging
- ✓ WiFi-HaLow Gateway
- ✓ Proximity sensors
- ✓ Rural internet access
- ✓ LAN construction
- ✓ Network blind spot coverage

2. Specifications

2.1 Generic Parameter

Table 2.1 General specification

Parameters	Description	
MCU	MT7628	
Wi-Fi HaLow module	HT-HC01	
Wi-Fi HaLow	IEEE 802.11ah	
Wi-Fi	IEEE 802.11n (2.4 GHz)	
Flash	32M	
RAM	128M	
Power Supply	5V/1~2A DC	
Power Consumption	Table 2.3	
Operating temperature	-40 ~ 85°C	
Operating humidity	10% ~ 90%, no-condensing	
Interface	USB Type-C	USB Network port
	DC-031A	Power Supply
	RJ45	Ethernet port
Dimensions	109*66*30.50 mm	

2.2 Wi-Fi HaLow parameters

Table 2.2 Wi-Fi HaLow Parameters

Parameter	Description
Module	HT-HC01

<https://heltec.org>

Wi-Fi Standard	IEEE 802.11ah
Frequency	902-928 MHz
Max. output power	21 dBm
Channel Bandwidth	1/2/4/8 MHz(see table2.5)
Data Rate	32.5 Mbps @ 8 MHz or 15 Mbps @ 4 MHz
Antenna connector	SMA

2.3 Power consumption

Table2.3 Power consumption

Mode		Min	Typical	Max	Units
Configuration			295		mA
AP	NONE		296		mA
	Ethernet		225		mA
	2.4G Wi-Fi		230		mA
STA			205		mA
Mesh Point			302		mA
Mesh Gate			264		mA

2.4 RF Specifications

2.4.1 Receiver sensitivities

Table2.4.1 Receiver sensitivities

Minimum Receive sensitivity (dBm) per BW			
1 MHz	2 MHz	4 MHz	8 MHz
-105	-103	-101	-97
-102	-100	-97	-93



-99	-97	-95	-91
-96	-94	-91	-88
-93	-90	-88	-85
-89	-87	-84	-80
-88	-85	-83	-79
-87	-84	-81	-77
-107	N/A		

2.4.2 Transmitter power

Table2.4.2 Transmitter power

TX output power(1,2MHz BW)	Min(dBm)	Typical(dBm)	Max(dBm)
MCS 0	20	21	22
MCS 7	16	17	18.5

TX output power(4MHz BW)	Min(dBm)	Typical(dBm)	Max(dBm)
MCS 0	20.5	21	22
MCS 7	16	17	18

TX output power(8MHz BW)	Min(dBm)	Typical(dBm)	Max(dBm)
MCS 0	20.5	21	21.5
MCS 7	15.5	17	17.5

2.5 Channel&Bandwidth

Table2.5 Channel&Bandwidth

Bandwidth(MHz)	Channel&Frequency(MHz)
----------------	------------------------



1	3(903.5), 5(904.5), 7(905.5), 9(906.5), 11(907.5), 13(908.5), 15(909.5), 17(910.5), 19(911.5), 21(912.5), 23(913.5), 25(914.5), 27(915.5), 29(916.5), 31(917.5), 33(918.5), 35(919.5), 37(920.5), 39(921.5), 41(922.5), 43(923.5), 45(924.5), 47(925.5), 49(926.5), 51(927.5)
2	6(905), 10(907), 14(909), 18(911), 22(913), 26(915), 30(917), 34(919), 38(921), 42(923), 46(925), 50(927)
4	8(906), 16(910), 24(914), 32(918), 40(922), 48(926)
8	12(908), 28(916), 44(924)

2.6 RGB status indicator description

Table2.6 RGB Status Indicator Description

Color	Status	Description
Red	Always on/Blinking	System booting
Green	Blinking	Getting IP address (AP/Mesh-gateway , @RJ45) HaLow connecting(STA/Mesh-Point, @RJ45)
	Always on ^①	Getted IP address (AP/Mesh-gateway , @ RJ45) Halow connected(STA/Mesh-Point, @RJ45)
Blue	Blinking	Getting IP address (AP/Mesh-gateway , @USB) HaLow connecting(STA/Mesh-Point, @USB)

^① In AP mode, after the connection network successfully. In STA mode, after obtaining the IP (regardless of whether the network is successfully connected).



	Always on ^②	Getted IP address (AP/Mesh-gateway , @ USB) Hallow connected(STA/Mesh-Point, @USB)
Yellow	Light up and release	Enter Configuration mode
White	Light up and release	Factory reset
Yellow-Green	Alternate flicker	Configuration mode
Yellow-Blue	Alternate flicker	Configuration mode
Purple	Blinking	Button pressed

2.7 Button description

When the button is successfully pressed, the device indicator will appear a purple light, and then the corresponding status indicator will appear.

Table2.6 Button description


Status	Description
Single press	Switch network connection mode. The switch is green when connected to RJ45, blue when connected to USB
Long press 3 seconds	Yellow light is on, the device enters configuration mode
Long press 10 seconds	White light is on, factory reset

^② In AP mode, after the connection network successfully. In STA mode, after obtaining the IP (regardless of whether the network is successfully connected).

3 Get Started

3.1 Installation bracket


- ① Tighten the bracket with screws
- ② Insert gateway into bracket from top to bottom

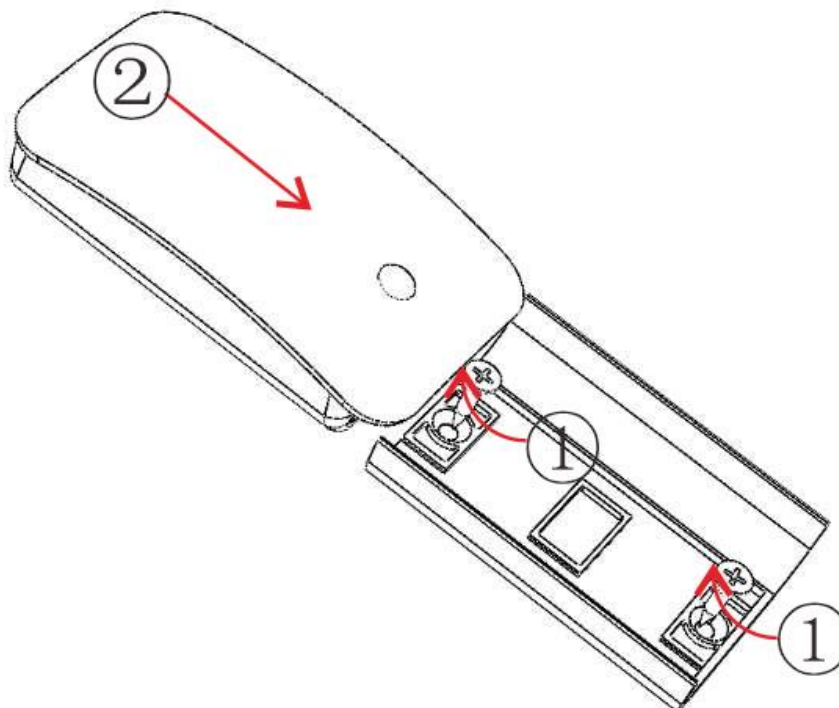

3.2 Hardware Connection

Plug in the power adapter, at this time the device RGB light is red. Power adapter

Specifications:5V/1A

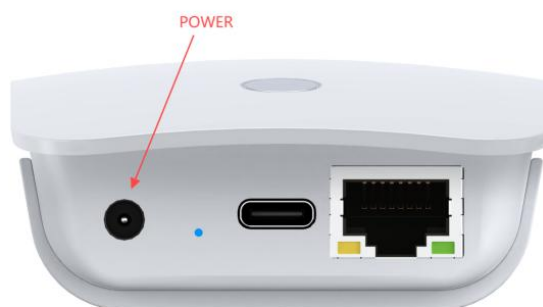



Connect the Antenna. The interface specification: SMA.




3.3 Configuration

Please refer to the [Heltec documentation page](https://heltec.org) for detailed configuration methods.



4 Hardware Dimensions

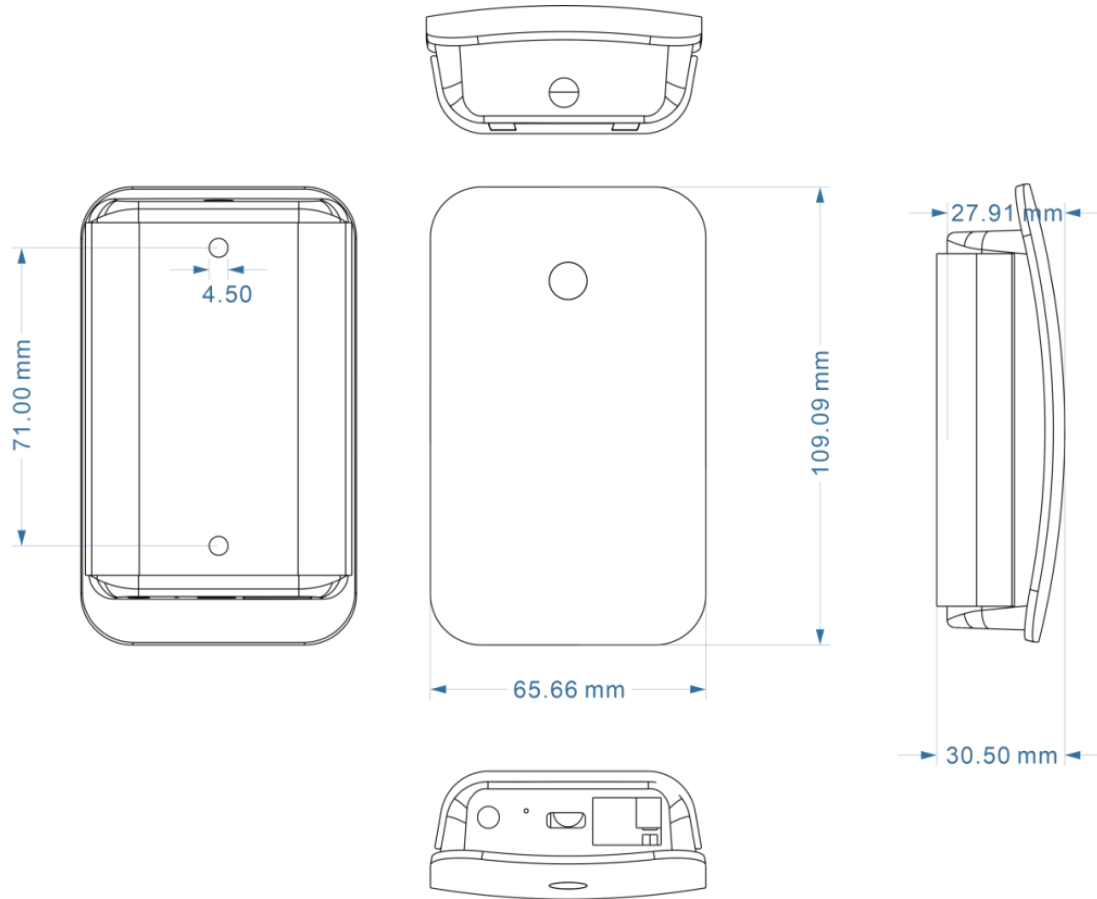



5.Resource

5.1 Relevant resource

- Documents Page: [Heltec Products Operation Documentation](#)
- Resource station: resource.heltec.cn

5.2 Heltec Contact Information

Heltec Automation Technology Co., Ltd

Chengdu, Sichuan, China

Email: support@heltec.cn

Phone: +86-028-62374838

<https://heltec.org>