


LoRa Node 151 Pinout Diagram

Notes:

- VEXT : External power supply (3.3V), control the switch of VEXT through GPIO(LOW-ON,HIGH-OFF)
- VDD : 3.3V
- VUSB : 5V

Legend:

- GND
- Power
- Control
- Touch Pin
- GPIO Port pin
- Analog Pin
- DAC
- Serial SPI I2C
- Physical Pin
- On-board hardware Pin

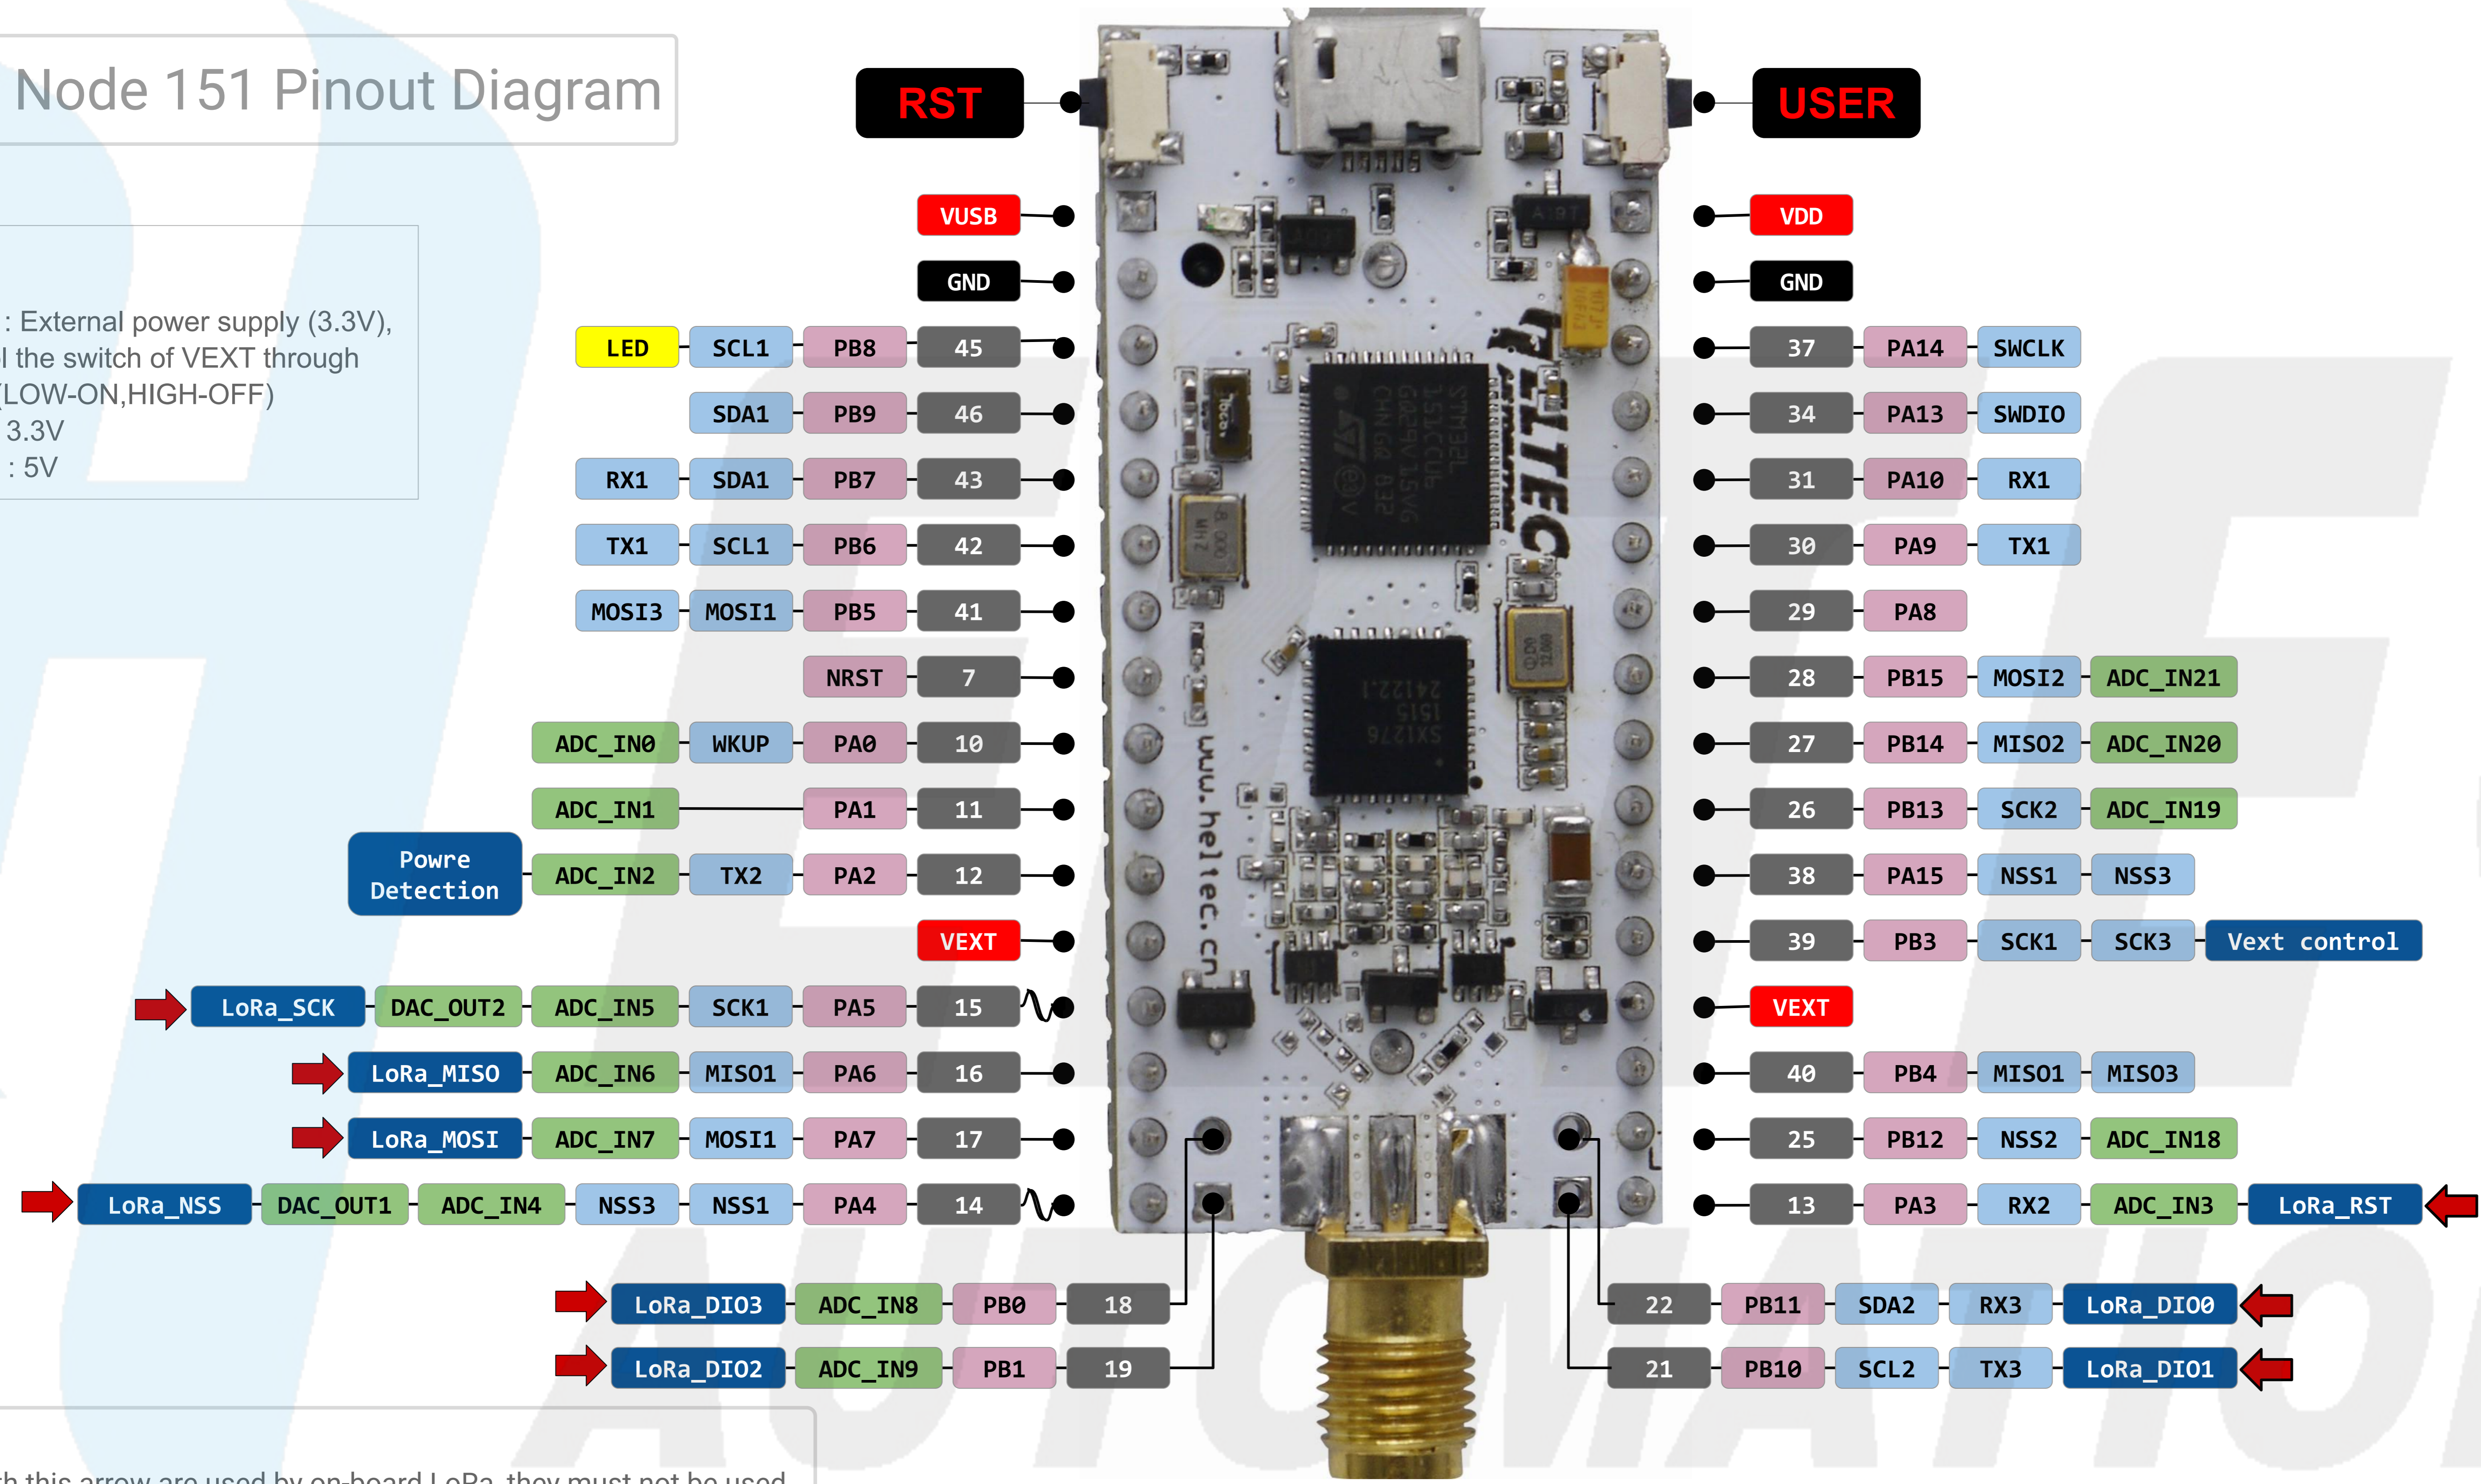

Pins with this arrow are used by on-board LoRa, they must not be used for other purpose unless you know what you are doing!