

RF Test Data for Bluetooth LE (Conducted Measurements)

General Description of EUT	
Product Name:	Mesh Node T096
Test Model:	Mesh Node T096
Test Standards:	ETSI EN 300 328 V2.2.2:2019
Environmental Conditions	
Temperature:	23.8℃
Relative Humidity:	48%
Test Voltage:	DC 5V
Test Engineer:	Lily. Zhang
Note: For a more detailed features description, please refer to the report TBR-C-202604-0497-8 The report only show the worst case data.	

Contents

1. RF Output Power	3
2. Power Spectral Density	4
3. Occupied Channel Bandwidth	8
4. Transmitter unwanted emissions in the out-of-band domain	12
5. Receiver Blocking	15

1. RF Output Power


Condition	Mode	Frequency (MHz)	Antenna	Max EIRP (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	1.63	20	Pass
NVNT	BLE 1Mbps	2440	Ant1	2.31	20	Pass
NVNT	BLE 1Mbps	2480	Ant1	2.98	20	Pass
NVNT	BLE 2Mbps	2402	Ant1	2.25	20	Pass
NVNT	BLE 2Mbps	2440	Ant1	2.3	20	Pass
NVNT	BLE 2Mbps	2480	Ant1	2.99	20	Pass

2. Power Spectral Density


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	1.56	10	Pass
NVNT	BLE 1Mbps	2440	Ant1	2.24	10	Pass
NVNT	BLE 1Mbps	2480	Ant1	2.91	10	Pass
NVNT	BLE 2Mbps	2402	Ant1	2.81	10	Pass
NVNT	BLE 2Mbps	2440	Ant1	1.14	10	Pass
NVNT	BLE 2Mbps	2480	Ant1	1.86	10	Pass

Test Graphs


PSD NVNT BLE 1Mbps 2402MHz Ant1

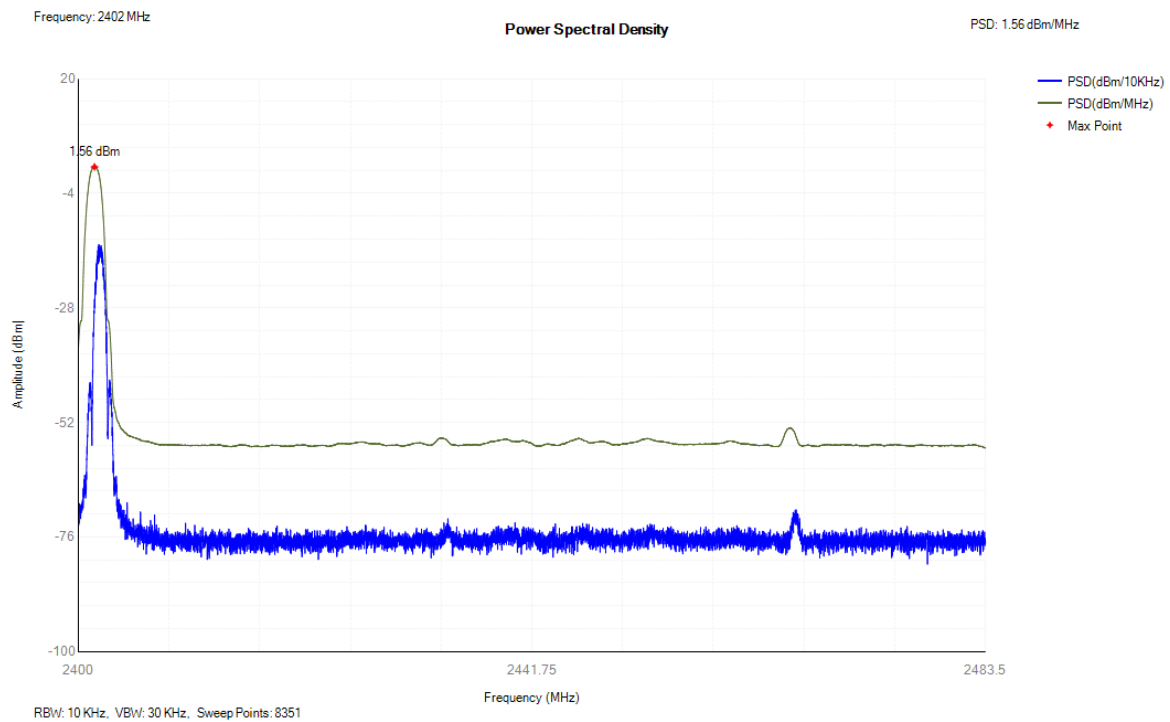


PSD NVNT BLE 1Mbps 2440MHz Ant1

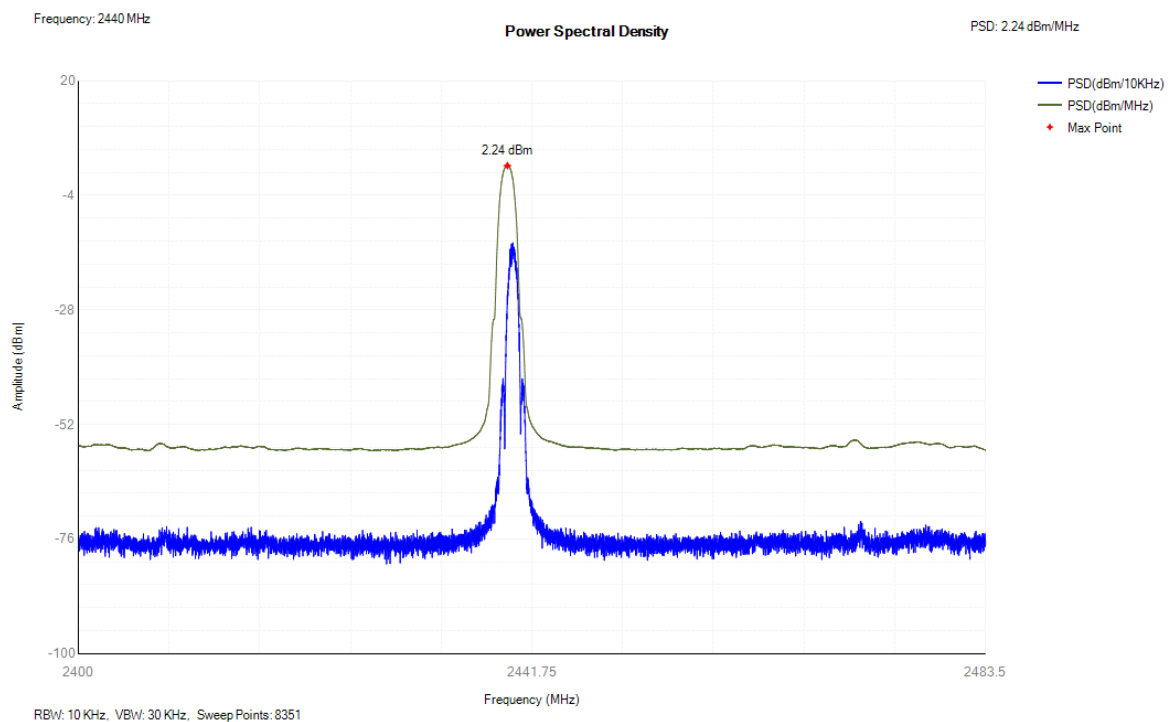


PSD NVNT BLE 1Mbps 2480MHz Ant1

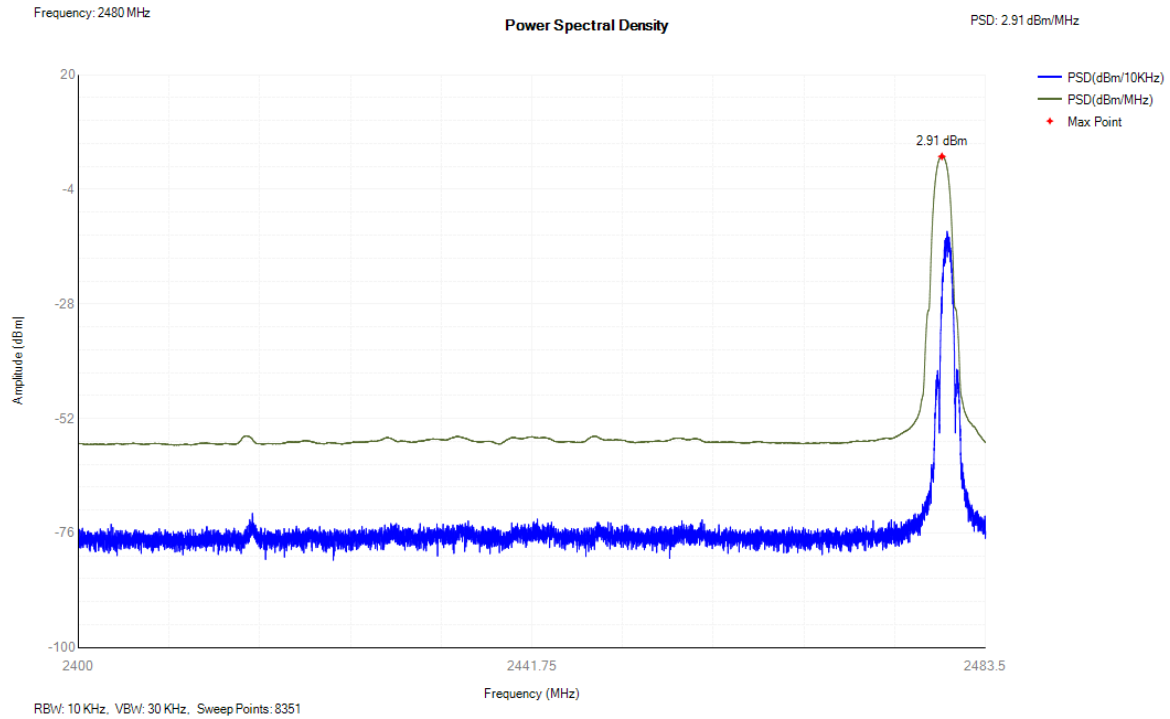


PSD NVNT BLE 2Mbps 2402MHz Ant1

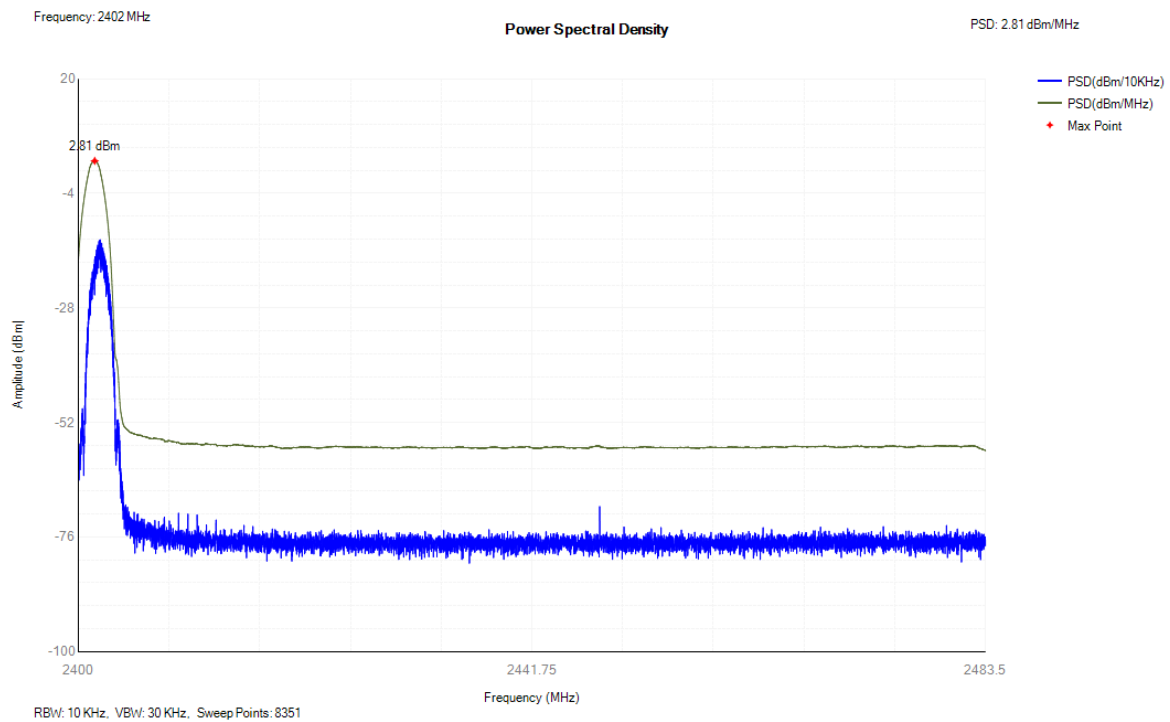

PSD NVNT BLE 2Mbps 2440MHz Ant1

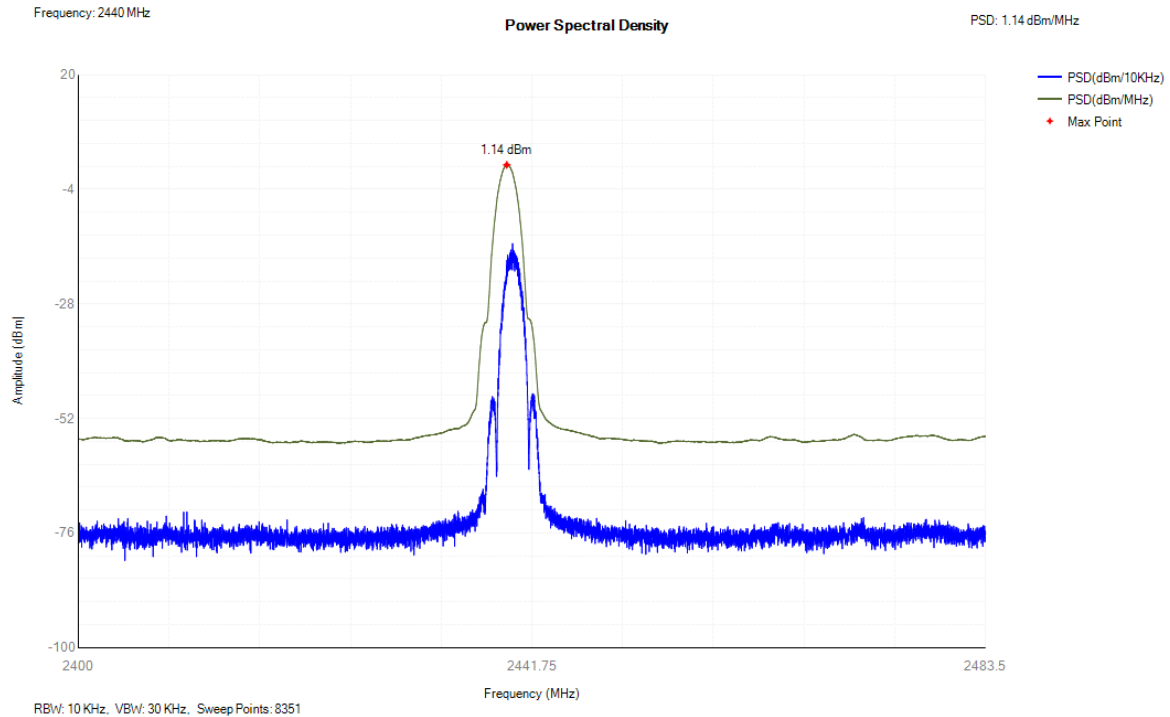

PSD NVNT BLE 2Mbps 2480MHz Ant1

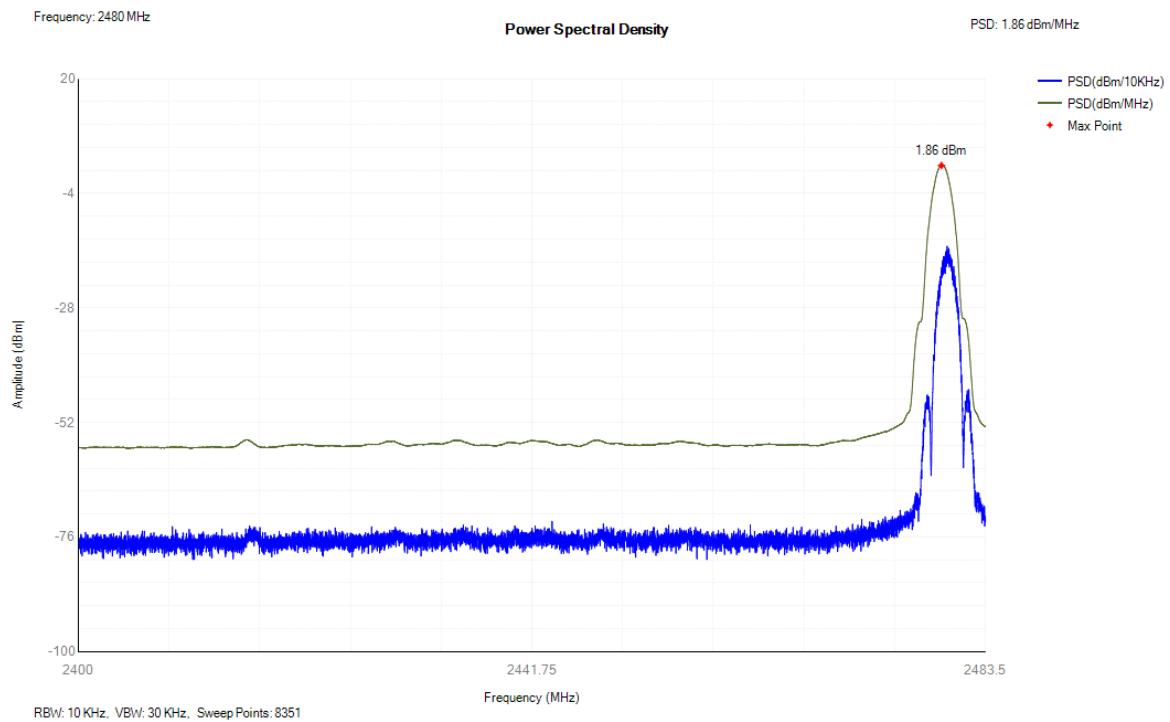


3. Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	2401.988	1.057	2401.46	2402.517	2400 - 2483.5MHz	Pass
NVNT	BLE 1Mbps	2440	Ant1	2439.994	1.057	2439.465	2440.523	2400 - 2483.5MHz	Pass
NVNT	BLE 1Mbps	2480	Ant1	2479.992	1.063	2479.46	2480.523	2400 - 2483.5MHz	Pass
NVNT	BLE 2Mbps	2402	Ant1	2401.984	2.08	2400.944	2403.023	2400 - 2483.5MHz	Pass
NVNT	BLE 2Mbps	2440	Ant1	2439.991	2.057	2438.963	2441.02	2400 - 2483.5MHz	Pass
NVNT	BLE 2Mbps	2480	Ant1	2479.991	2.083	2478.95	2481.032	2400 - 2483.5MHz	Pass

Test Graphs


OBW NVNT BLE 1Mbps 2402MHz Ant1

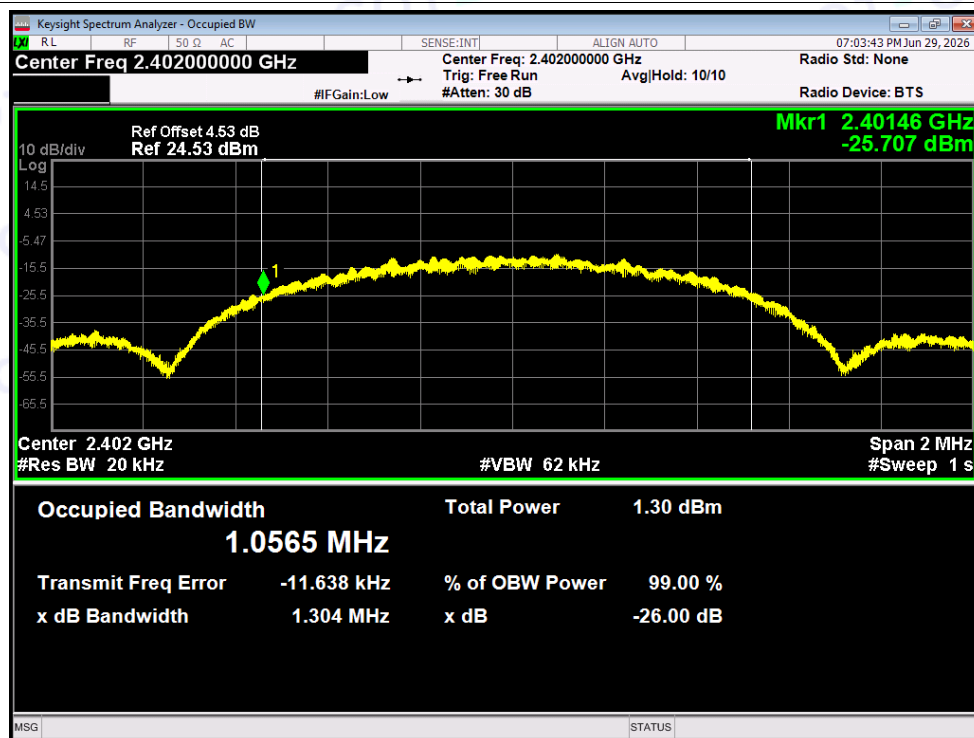


OBW NVNT BLE 1Mbps 2440MHz Ant1

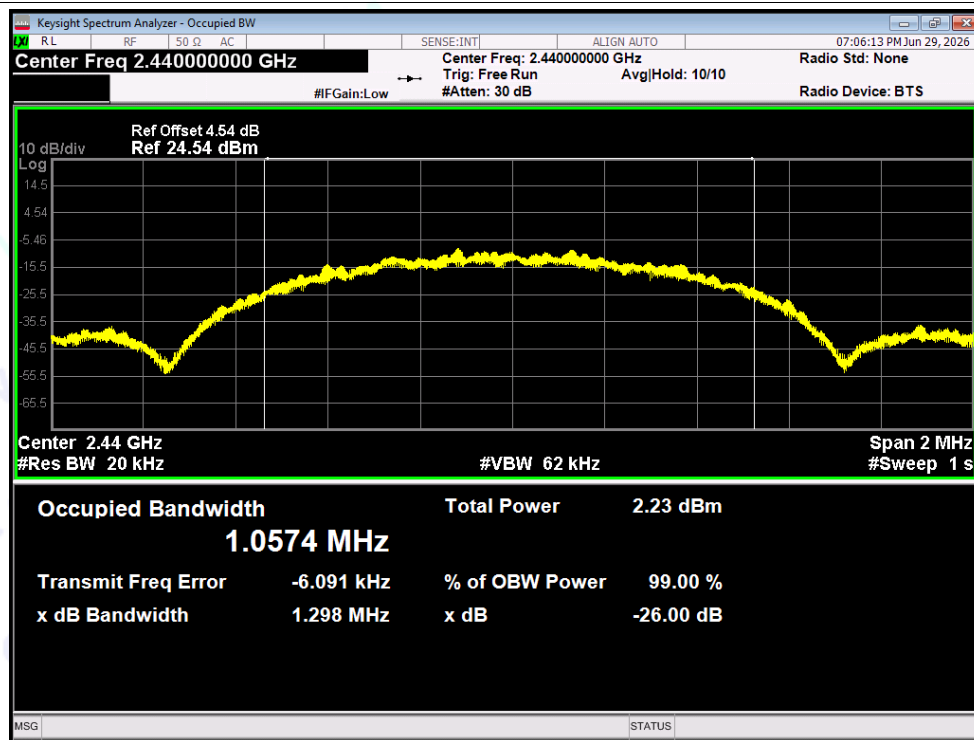


OBW NVNT BLE 1Mbps 2480MHz Ant1

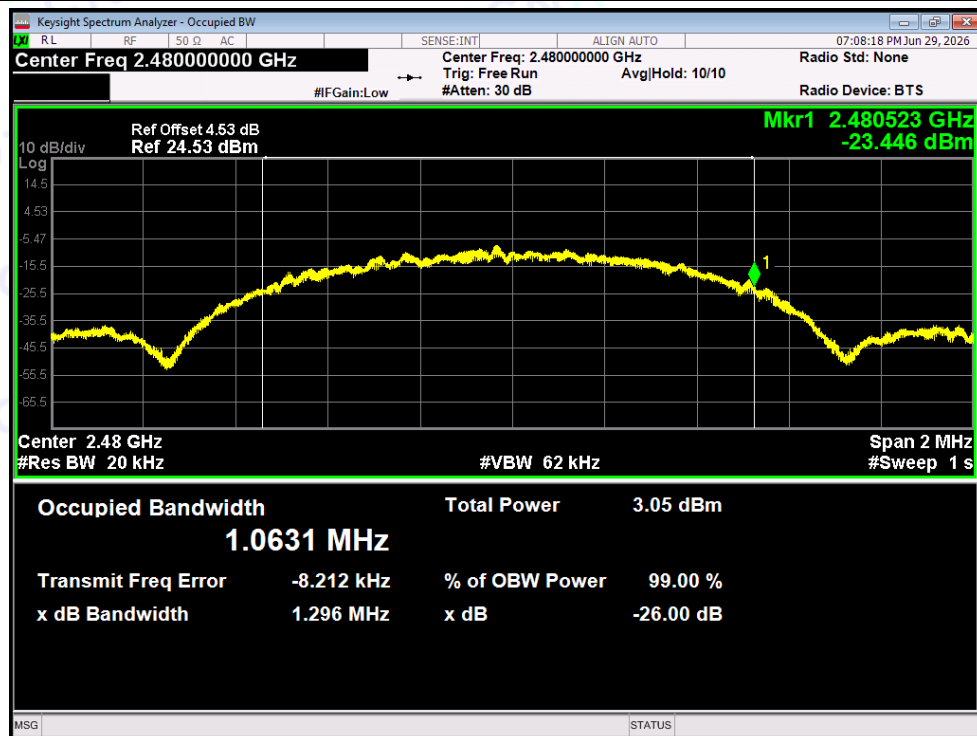


OBW NVNT BLE 2Mbps 2402MHz Ant1

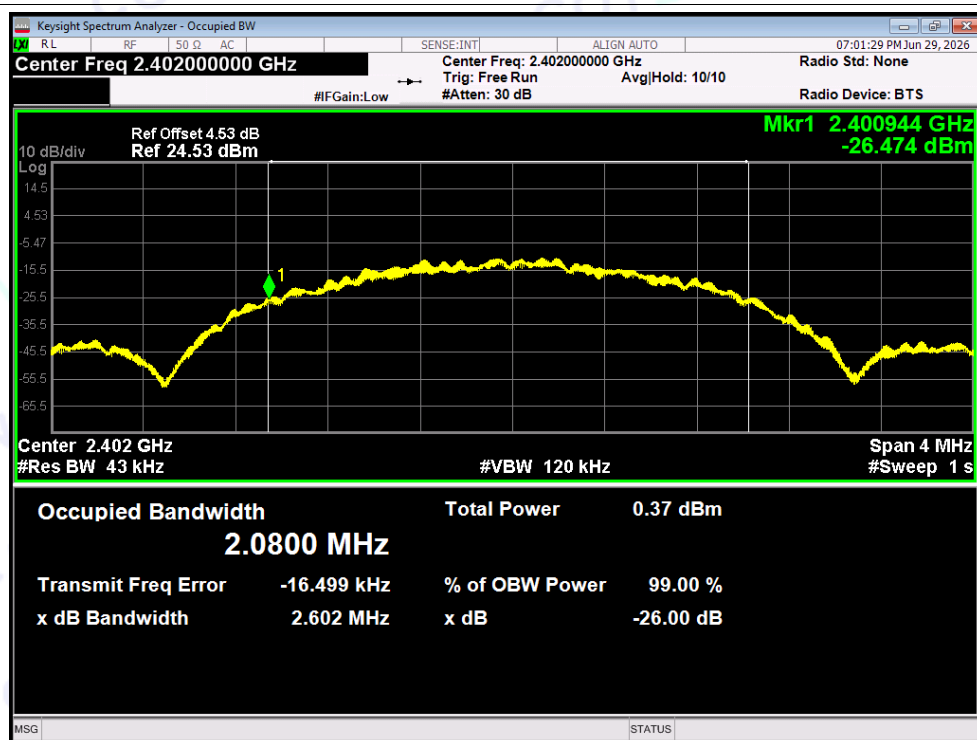

OBW NVNT BLE 2Mbps 2440MHz Ant1

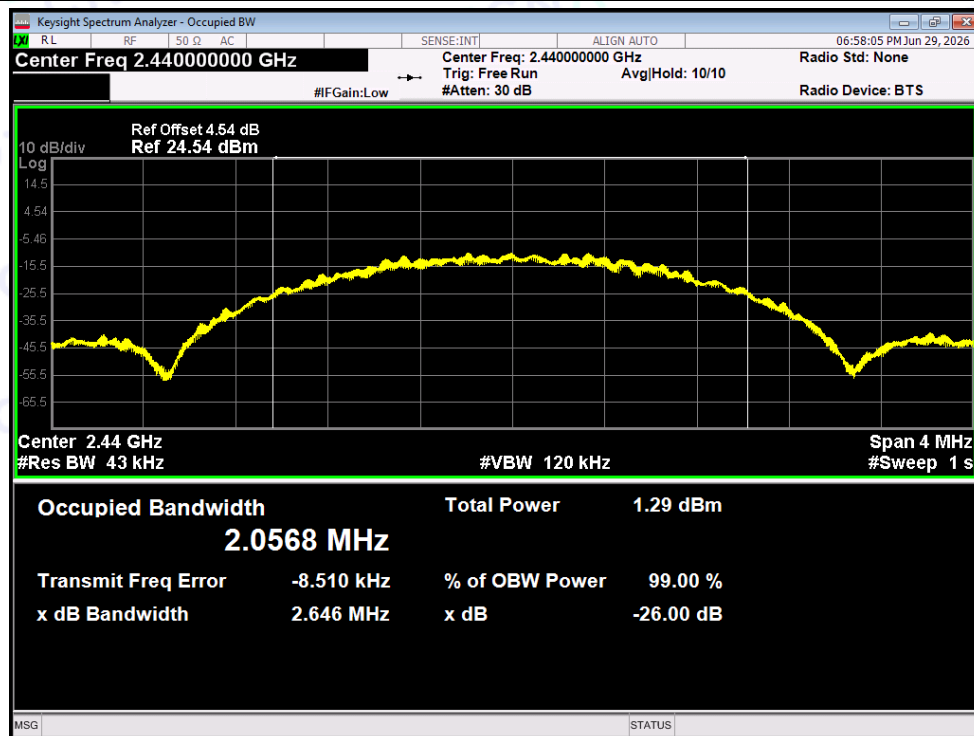

OBW NVNT BLE 2Mbps 2480MHz Ant1

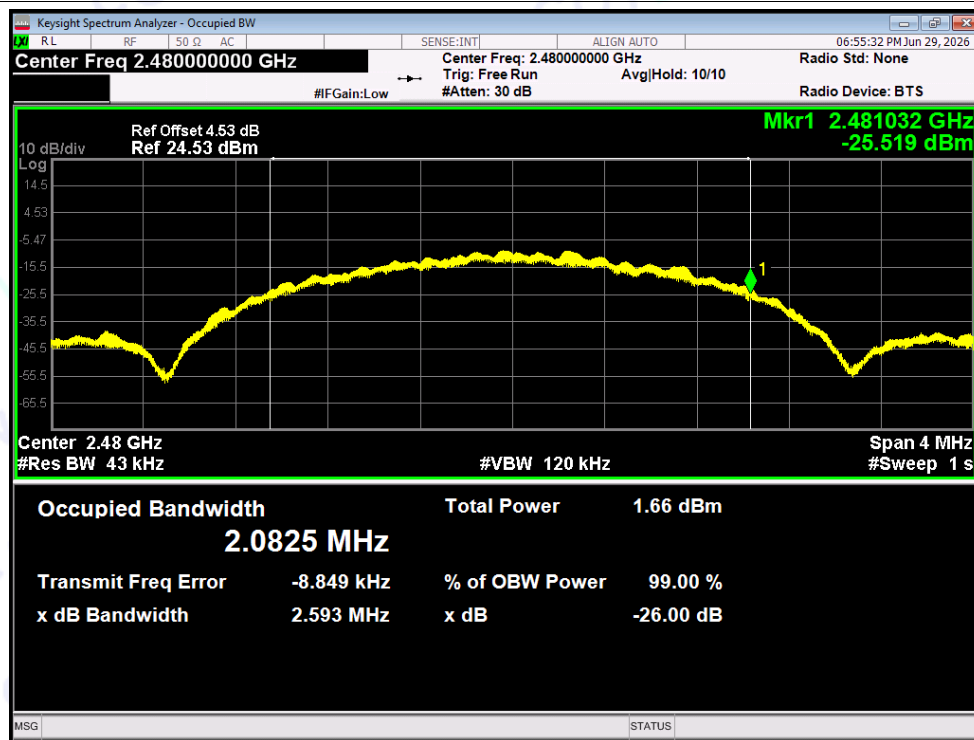

4. Transmitter unwanted emissions in the out-of-band domain


Condition	Mode	Frequency (MHz)	Antenna	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	2399.5	-55.77	-10	Pass
NVNT	BLE 1Mbps	2402	Ant1	2399.443	-56.44	-10	Pass
NVNT	BLE 1Mbps	2402	Ant1	2398.443	-60.79	-20	Pass
NVNT	BLE 1Mbps	2402	Ant1	2398.386	-60.89	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	2484	-60.38	-10	Pass
NVNT	BLE 1Mbps	2480	Ant1	2484.063	-60.45	-10	Pass
NVNT	BLE 1Mbps	2480	Ant1	2485.063	-61.94	-20	Pass
NVNT	BLE 1Mbps	2480	Ant1	2485.126	-62	-20	Pass
NVNT	BLE 2Mbps	2402	Ant1	2399.5	-38.44	-10	Pass
NVNT	BLE 2Mbps	2402	Ant1	2398.5	-55.61	-10	Pass
NVNT	BLE 2Mbps	2402	Ant1	2398.42	-56.23	-10	Pass
NVNT	BLE 2Mbps	2402	Ant1	2397.42	-58.95	-20	Pass
NVNT	BLE 2Mbps	2402	Ant1	2396.42	-60.2	-20	Pass
NVNT	BLE 2Mbps	2402	Ant1	2396.34	-60.29	-20	Pass
NVNT	BLE 2Mbps	2480	Ant1	2484	-55.92	-10	Pass
NVNT	BLE 2Mbps	2480	Ant1	2485	-57.55	-10	Pass
NVNT	BLE 2Mbps	2480	Ant1	2485.083	-57.66	-10	Pass
NVNT	BLE 2Mbps	2480	Ant1	2486.083	-58.82	-20	Pass
NVNT	BLE 2Mbps	2480	Ant1	2487.083	-59.89	-20	Pass
NVNT	BLE 2Mbps	2480	Ant1	2487.166	-59.99	-20	Pass

Test Graphs

Tx. Emissions OOB NVNT BLE 1Mbps 2402MHz Ant1

Frequency: 2402 MHz


Transmitter unwanted emissions in the out-of-band domain

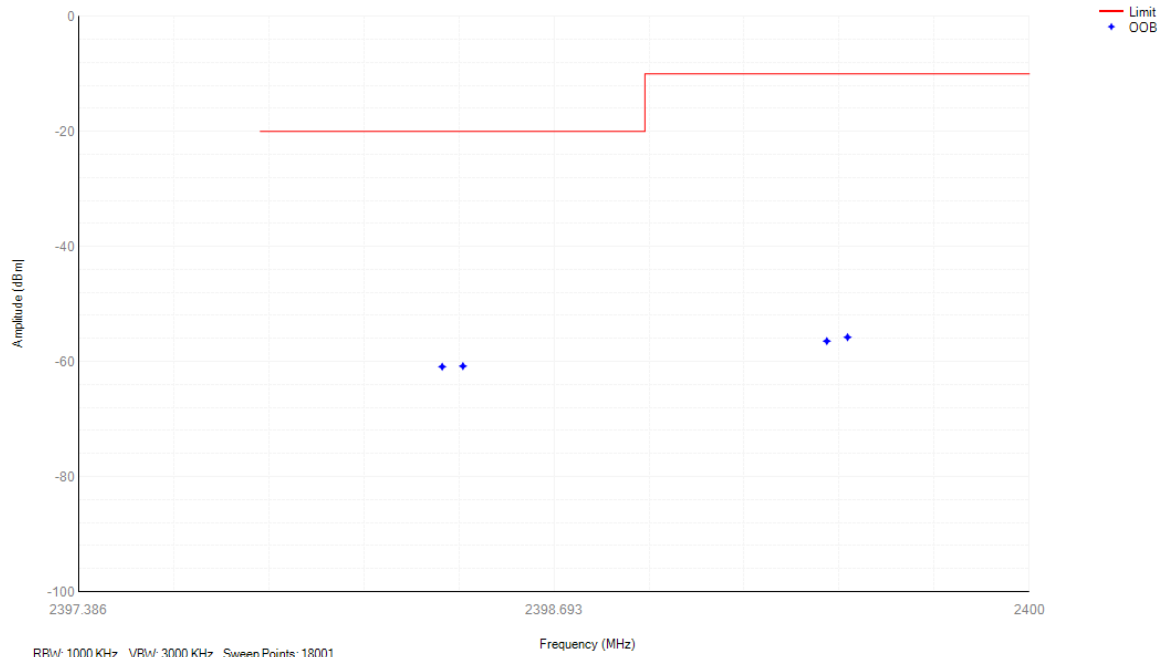


Tx. Emissions OOB NVNT BLE 1Mbps 2480MHz Ant1

Frequency: 2480 MHz


Transmitter unwanted emissions in the out-of-band domain

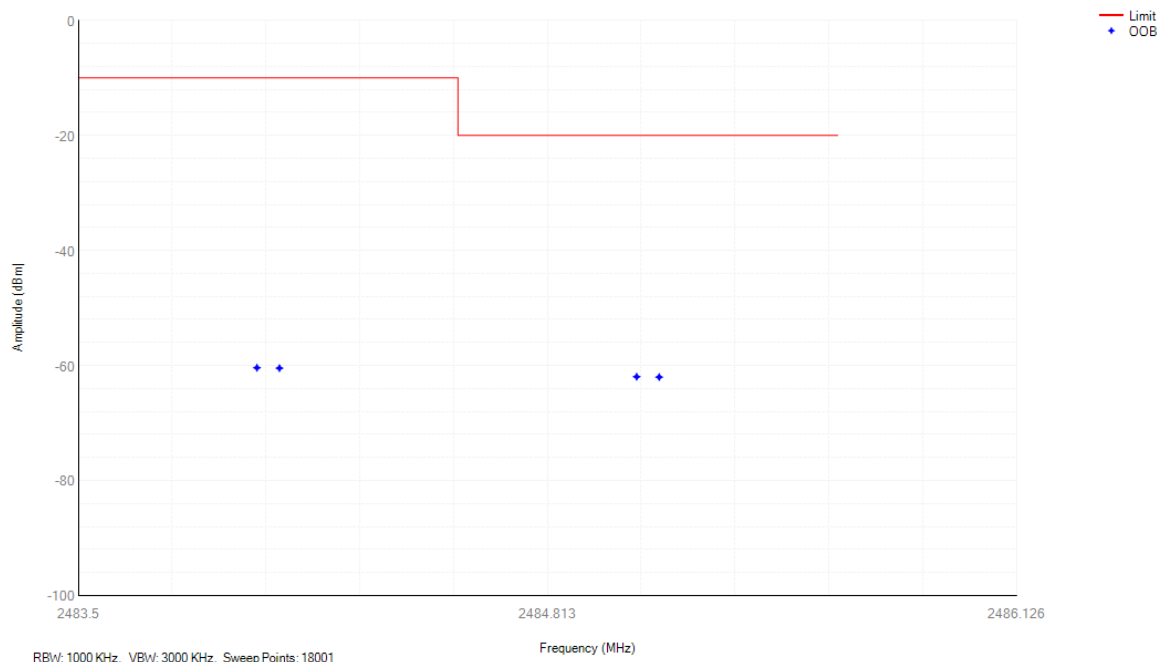

Tx. Emissions OOB NVNT BLE 2Mbps 2402MHz Ant1

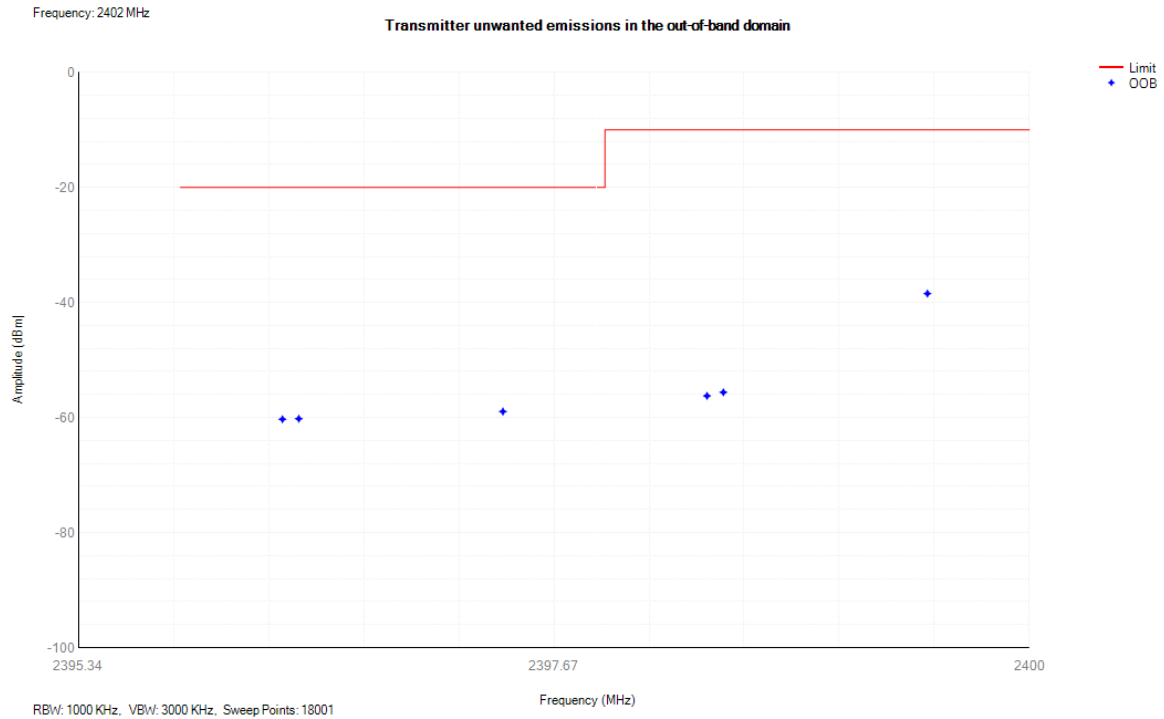

Tx. Emissions OOB NVNT BLE 2Mbps 2480MHz Ant1

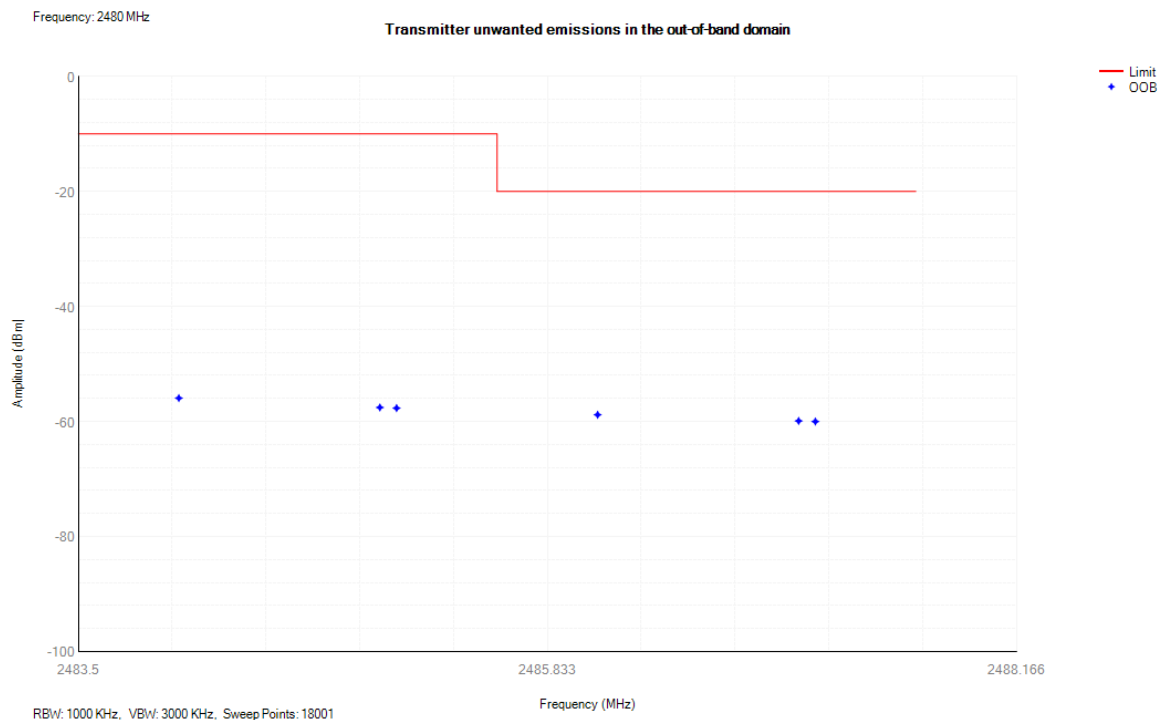

5. Receiver Blocking

Condition	Mode	Frequency (MHz)	Antenna	Wanted Power (dBm)	Blocking Frequency (MHz)	Blocking Power (dBm)	PER (%)	Limit (%)	Verdict
NVNT	BLE 1Mbps	2402	Ant1	-68.76	2380	-31.68	1.1	10	Pass
NVNT	BLE 1Mbps	2402	Ant1	-68.76	2504	-31.68	1.2	10	Pass
NVNT	BLE 1Mbps	2402	Ant1	-68.76	2300	-31.68	0.9	10	Pass
NVNT	BLE 1Mbps	2402	Ant1	-68.76	2584	-31.68	1	10	Pass
NVNT	BLE 1Mbps	2480	Ant1	-68.73	2380	-31.68	0.9	10	Pass
NVNT	BLE 1Mbps	2480	Ant1	-68.73	2504	-31.68	1.2	10	Pass
NVNT	BLE 1Mbps	2480	Ant1	-68.73	2300	-31.68	1.3	10	Pass
NVNT	BLE 1Mbps	2480	Ant1	-68.73	2584	-31.68	1.5	10	Pass


Test Graphs

Rx. Blockings NVNT BLE 1Mbps 2402MHz Ant1

Frequency: 2402 MHz

Receiver Blocking

Value:

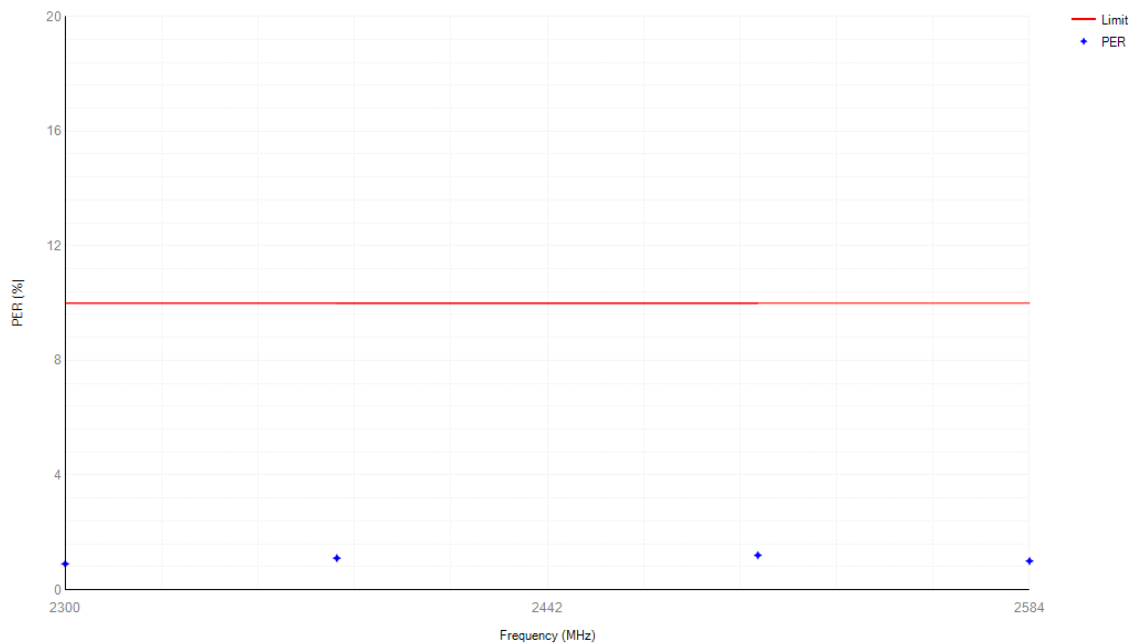


Settings:

Rx. Blockings NVNT BLE 1Mbps 2480MHz Ant1

Frequency: 2480 MHz

Receiver Blocking

Value:

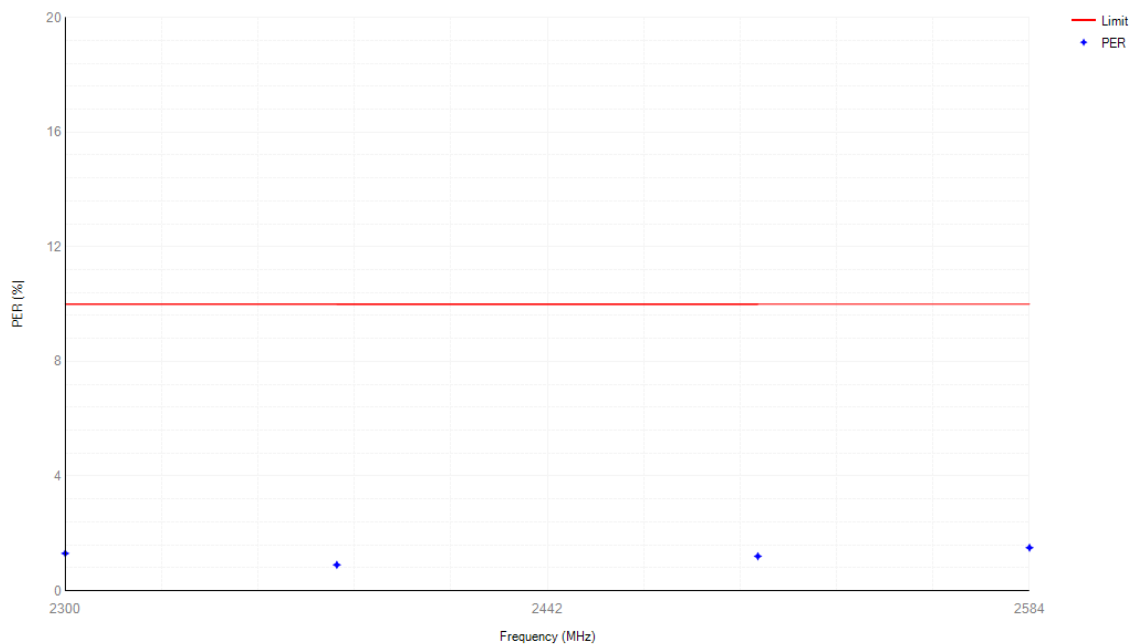

Settings:

-----END OF THE REPORT-----