


Mesh Node GPS TEST

Hardware Preparation


- Mesh Node T1 module
- USB- C cable
- Laptop

Operating Procedures


1. Connect the Mesh Node T1 to your laptop via the USB- C cable.
2. Double-press the Power button on the Mesh Node T1 to enter DFU mode. A removable disk drive labeled *Mesh Node T1* will pop up on your computer.
3. Drag and drop the firmware file **GPS-test-firmware.uf2** into this disk drive to complete firmware flashing.




4. Extract the tool package and install the test program **UPrecise-V2.0.1121_install.exe** on your laptop. Select the default settings for all options.

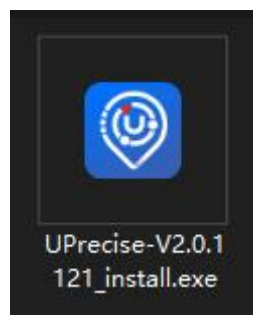


5. Launch the installed UPrecise test tool and click the Connect button.

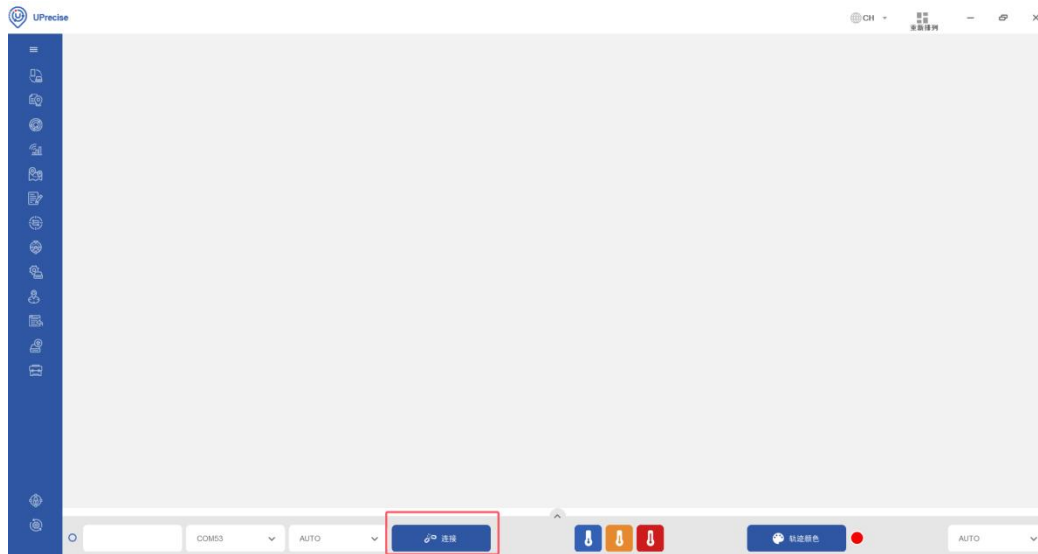


6. Keep the tool running for a period of time (Wait for at least 10 minutes, preferably half an hour if possible.), then the three interfaces and send them to us.

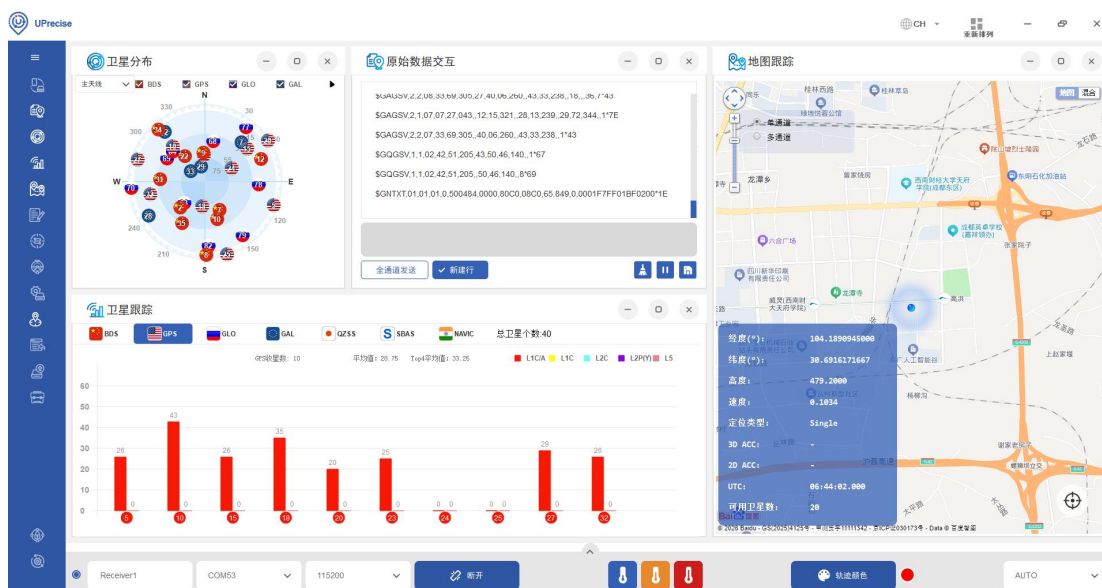


7. Tap the button down below to save logs and send them over to us.

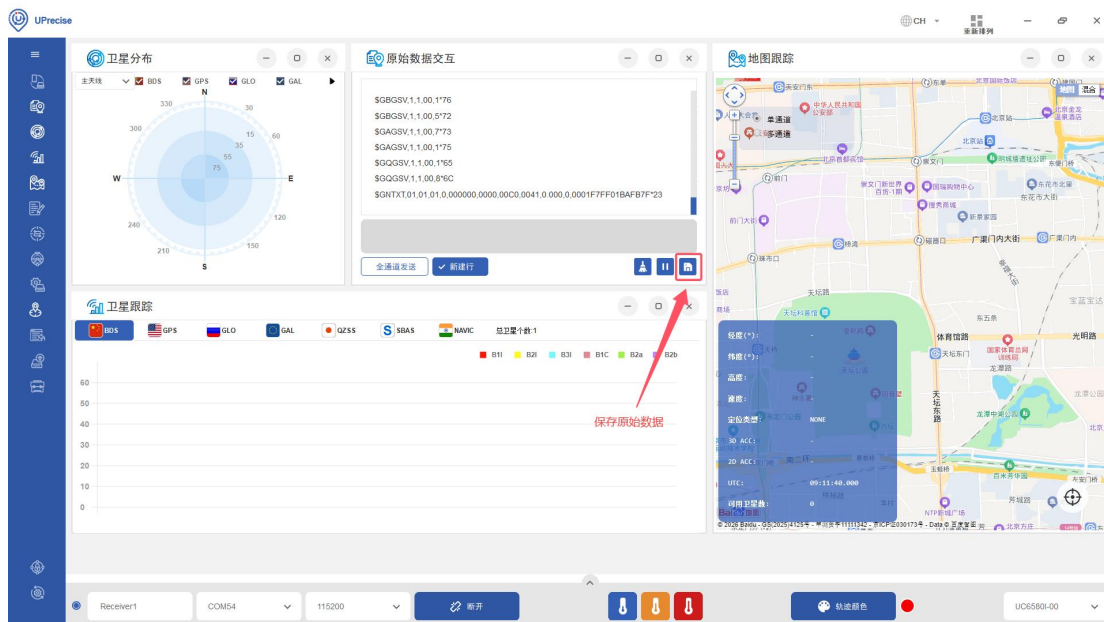

8. Click the icon below to access the detail page, then send us the images from this page.

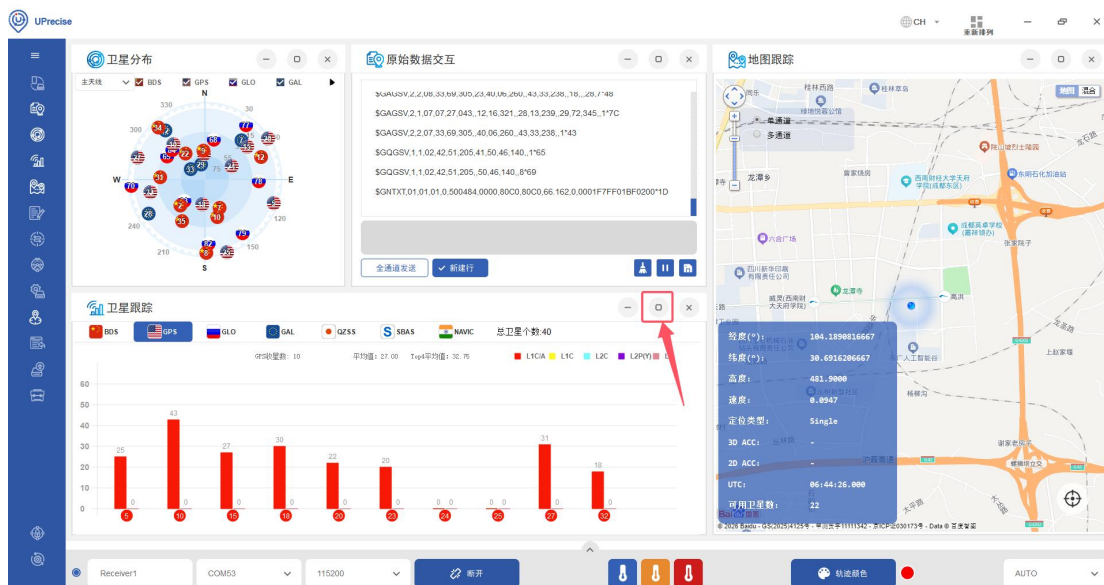

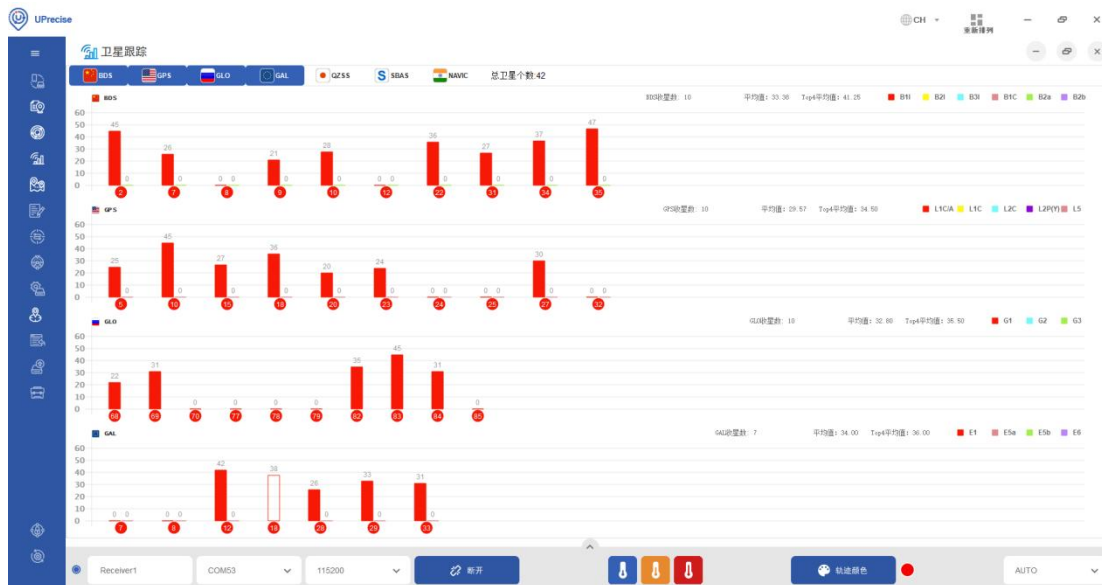

Send your test results to support@heltec.cn, and mark your **region** together with current **weather** in the email.
We appreciate your support and cooperation.