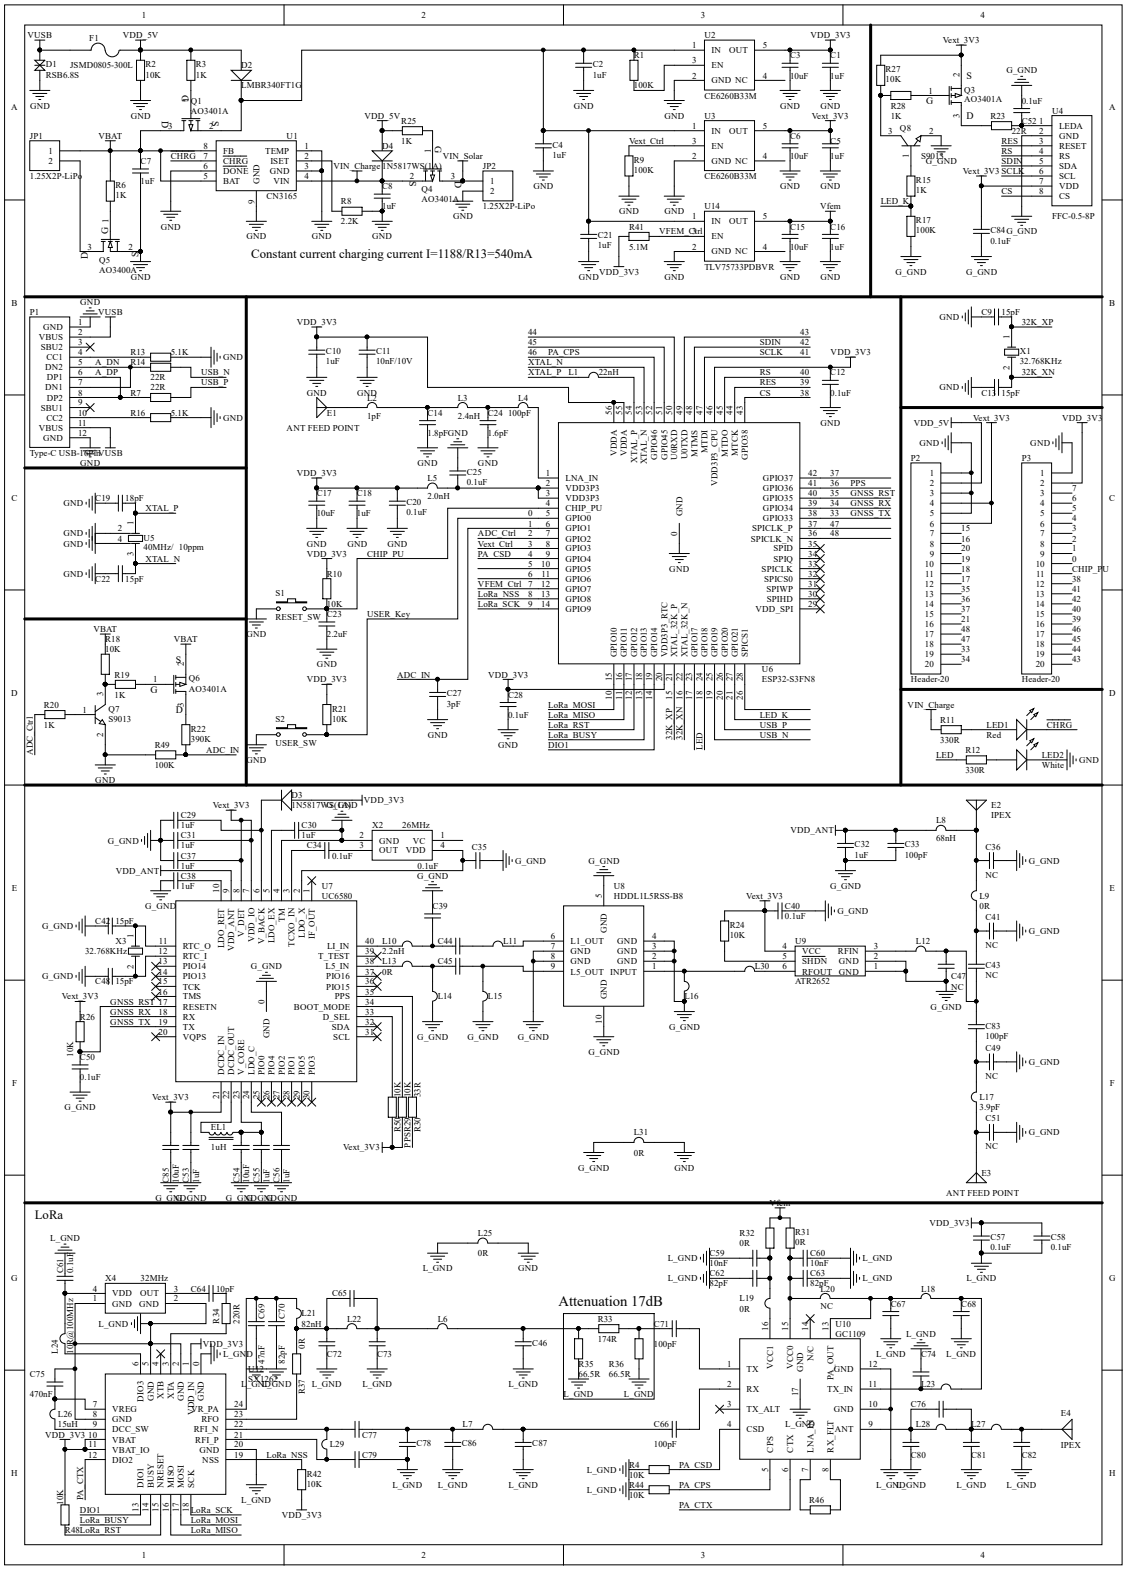
Constant current charging current I=1188/R13=540mA
LoRa
Attenuation 17dB
ANT FEED POINT
ESP32-S3FN8
CN3165
UC6580
HDDL.1L5RSS-B8
ATR2652
GC1109
TLV75733PDBVR
CE6260B33M
AO3401A
AO3400A
FFC-0.5-8P
Header-20
Type-C USB-Female
1.25X2P-LiPo
32.768KHz
32MHz
26MHz
IPEX